

IQFDA31

Dual-channel 3G/HD/SD-SDI Reclocking Distribution Amplifier with Fiber I/O

Extremely space-efficient hybrid distribution amplifier for mixed fiber and copper workflows, with dual 3G/HD/SD-SD inputs with both SDI and fiber optic outputs.


The IQFDA31 from Grass Valley provides dual HD-SDI 3 Gb/s, 1.5 Gb/s or 270 Mb/s SD-SDI inputs with both SDI and fiber optic outputs in a single-width package. Flexible routing of inputs to outputs allows the module to operate as single- or dual-channel mixing fiber and copper I/O. Input signal loss detection enables switching from a main to back-up feed automatically, providing emergency changeover functionality. Its 80m 3G, 170m HD input equalization performance and non-reclocking distribution of wideband signals make it ideal for all distribution applications.

Why should you choose this module?

- The IQFDA31 is an extremely space-efficient hybrid distribution amplifier for mixed fiber and copper workflows
- Useful for critical installation thanks to outstanding input equalization capability
- Full GV Orbit compatibility provides an all-inclusive remote configuration, control and monitoring solution
- Comprehensive SNMP support allows easy integration with third-party Network Management Systems

KEY FEATURES

- Dual-channel intelligent 3G/HD/SD-SDI reclocking distribution amplifier
- Flexible selection of inputs allows single- or dual-channel operation
- Input signal monitoring allows auto-changeover functionality to provide emergency switching
- Will distribute DVB-ASI and other wideband signals
- Equalizes up to 80m at 3 Gb/s, 170m at 1.5 Gb/s and 300m at 270 Mb/s when using Belden 1694A cable
- Standards supported:
 - 3G-SDI to SMPTE ST 424/425
 - HD-SDI to SMPTE ST 292
 - SD-SDI to SMPTE ST 259-C
 - DVB-ASI
 - SMPTE ST 297-2006
- 1310 nm and CWDM output wavelengths available
- GV Orbit control and monitoring compatible
- Extremely compact — up to 32 channels in 3 RU — for use where space is at a premium

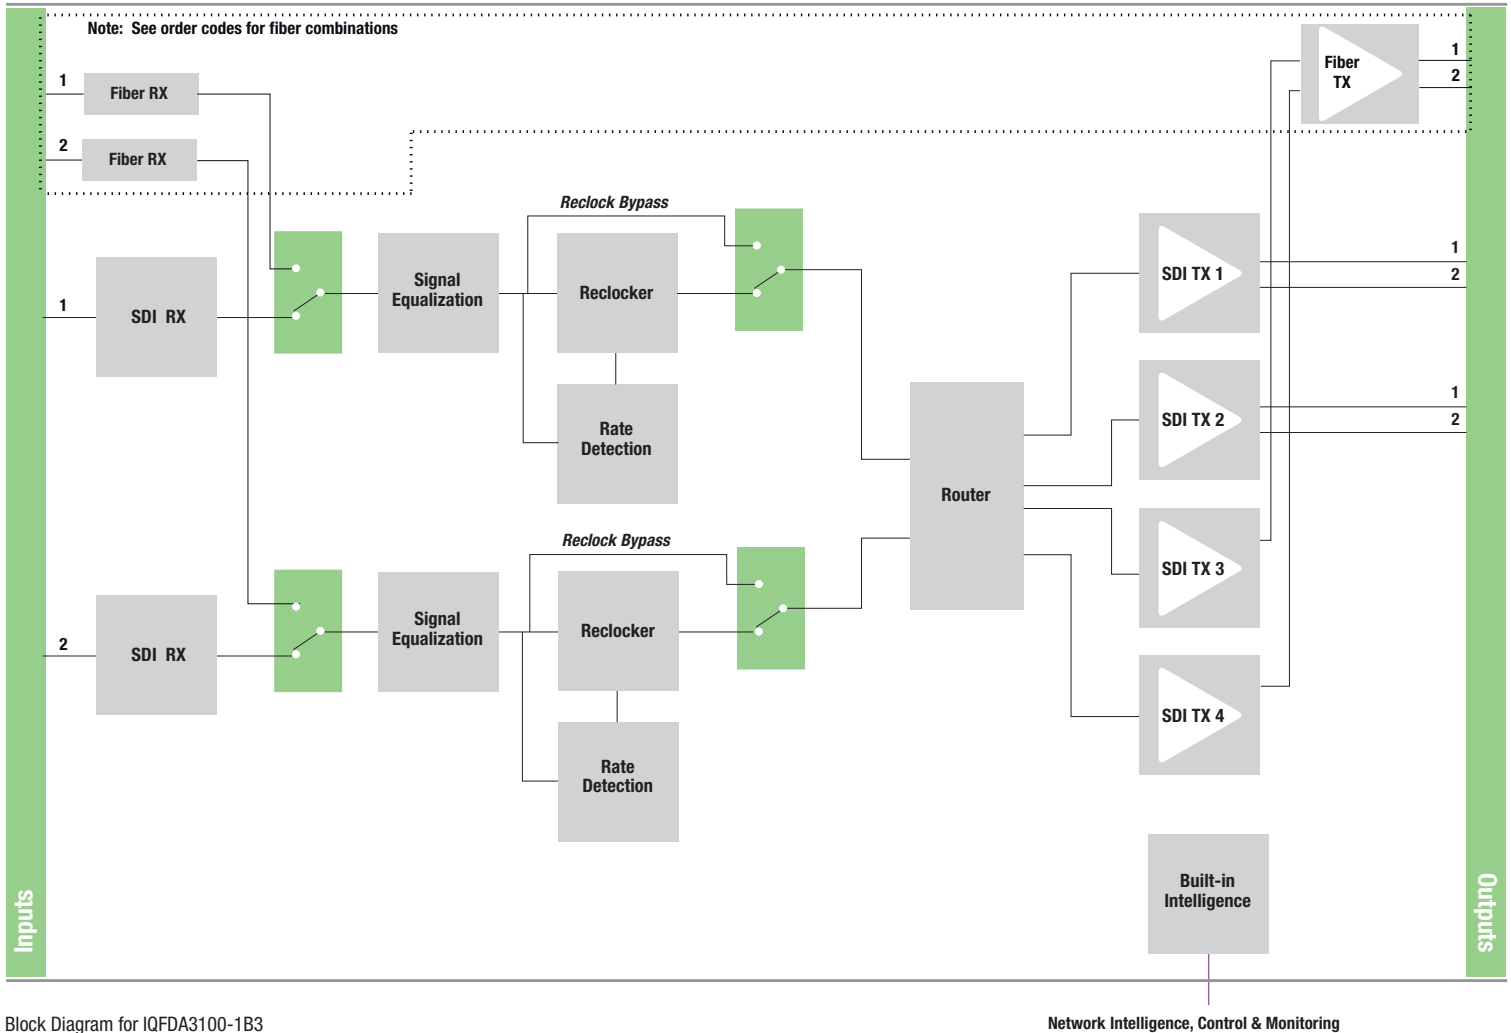

Block Diagram for IQFDA3100-1B3

SPECIFICATIONS

Inputs and Outputs

Signal Input

SDI inputs: 2x

Input cable length:

- Up to 80m Belden 1694A @ 3 Gb/s
- Up to 170m Belden 1694A @ 1.5 Gb/s
- Up to 300m Belden 1694A @ 270 Mb/s

Note: When using mixed HD and SD inputs it is recommended that cable lengths do not exceed the HD specification of 140m.

Fiber Signal Input

Inputs: Up to 2

Optical: 3 Gb/s HD-SDI, 1.485 Gb/s HD-SDI or 270 Mb/s SD-SDI

Connector/format: LC singlemode

Conforms to:

- SMPTE ST 297-2006
- SMPTE ST 424/425 (HD level A/B)
- SMPTE ST 292 (HD)
- SMPTE ST 259-C (SD)

Signal Outputs

SDI outputs: Up to 4

Fiber Signal Output

Outputs: Up to 2, selectable per channel

Optical: 3 Gb/s HD-SDI, 1.485 Gb/s HD-SDI or 270 Mb/s SD-SDI

Connector/format: LC singlemode

Conforms to:

- SMPTE ST 297-2006
- SMPTE ST 424/425 (HD level A/B)
- SMPTE ST 292 (HD)
- SMPTE ST 259-C (SD)

Controls

Indicators

Power: OK (Green)

CPU: OK (Green flashing)

Input 1: OK (Green), Bypass (Orange), Loss (Red)

Input 2: OK (Green), Bypass (Orange), Loss (Red)

SFP A: Selected (Green)

SFP B: Selected (Green)

RollCall Functions

Video Controls

Input 1 format select: SDI, Rx

Input 2 format select: SDI, Rx

Output 1 select: Serial 1, Serial 2

Output 2 select: Serial 1, Serial 2

Output 3 select: Serial 1, Serial 2

Output 4 select: Serial 1, Serial 2

Laser disable: On/Off

Input 1 (2) select: Auto, 3G, HD, SD, DVB-ASI, Bypass (reclocking off), Output

Input status: Present, Loss/Unknown, Data Rate

Other Controls

User memories: Name, save and recall 16 user memories

Memory naming: User configurable naming of memories 1 – 16

Information window: Video Input Status

Logging:

- Input 1 (2) Type
- Input 1 (2) Data Rate
- Input 1 (2) Present
- Input 1 (2) Error
- Input 1 (2) Loss

SPECIFICATIONS (CONT.)**Optical logging*:**

- Tx Laser Bias High Warning
- Tx Power Low Warning
- Tx Power High Warning

Laser wavelength:

- Input 1 (2) Rx Power High Warning
- Input 1 (2) Rx Power Low Warning
- Input 1 (2) Rx Power Measurement

RollTrack index: Up to 16 RollTrack destinations

RollTrack controls: On/Off, Index, Source, Address, Command, Status, Sending

RollTrack sources: Unused, Input Present (1&2, Fiber 1 & 2), Input Loss (1&2, Fiber 1 & 2), Output Rate/Std (1&2), Out 1 Selects (In1 & 2 & Rx1 & Rx2), Out 2 Selects (In1 & 2 & Rx1 & Rx2), Fiber Rx Power OK (1&2), Fiber Rx Power Fail (1&2), Fiber Tx Bias OK (1&2), Fiber Tx Bias High (1&2), Fiber Tx Bias Low (1&2)

Factory default: Resets all module settings to factory specified default values and clears memories

Default settings: Resets all module settings to factory specified defaults but does not clear memories

Restart: Software restart of the module

Module information:

Reports following module information: Software version, Serial number, Build number, KOS version, Firmware version, PCB version

General Specifications**Electrical:**

- 3 Gb/s SDI, SMPTE ST 424/425
- 1.5 Gb/s HD-SDI, SMPTE ST 292
- 270 Mb/s SDI, SMPTE ST 259-C / DVB-ASI

Connector/format: BNC/75Ω panel jack on standard Grass Valley connector panel

Return loss:

- >-15 dB (270 Mb/s, 1.5 Gb/s)
- >-10 dB (3 Gb/s)

Output jitter:

- SD-SDI 0.2 UI (10 Hz) / 0.2 UI (1 kHz)
- 3G/HD-SDI 1.0 UI (10 Hz) / 0.2 UI (100 kHz)

Optical 1310 nm Tx

Wavelength: 1310 nm

Spectral width (FWHM): >1.5 nm (typ)

Output power: 0 to -5 dBm typical (-2 dBm typical)

Rise and fall time:

- 135 ps @ 3 Gb/s
- 270 ps @ 1.5 Gb/s
- 1.5 ns @ 270 Mb/s

Extinction ratio: >7.5:1 (typ.)

Optical return loss: -27 dB

Link distance:

- Up to 30 km @ 270 Mb/s
- Up to 21 km @ 1.5 Gb/s
- Up to 10 km @ 3 Gb/s

Optical Rx

Input wavelength range: Min. 1260 nm, Max. 1620 nm

Input sensitivity: -21 dBm

Optical power input range: > -0 dBm, < -20 dBm

Link distance:

- Up to 30 km @ 270 Mb/s
- Up to 21 km @ 1.5 Gb/s
- Up to 10 km @ 3 Gb/s

Power Consumption

Module power consumption: 4.5 PR Max (B Frames)

* Dependent upon the SFP variant inserted.

ORDERING**IQFDA3100-1B3**

Dual-channel 3G/HD/SD-SDI reclocking distribution amplifier with fiber I/O. 2 SDI inputs, 2 optical input/outputs, 4 SDI outputs selectable per input.

Fiber SFP Options

FC1-13T1 — with single fiber transmitter (1310 nm)

FC1-13T2 — with dual fiber transmitter (1310 nm)


FC1-R1 — with single fiber receiver

FC1-R2 — with dual fiber receiver

FC1-13TR — with single fiber transceiver (1310 nm)

Note: Fiber SFP type must be ordered in addition to the module.

For more details on enclosure types please refer to the IQ Modular Enclosures datasheet.

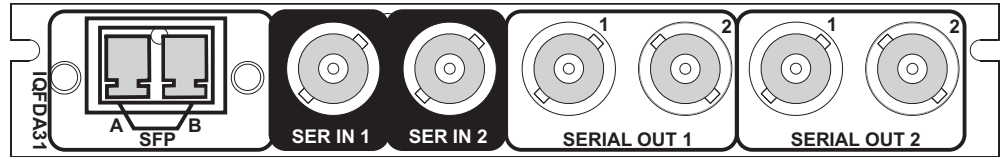

WWW.GRASSVALLEY.COM

Join the Conversation at [GrassValleyLive](#) on Facebook, Twitter, YouTube and [Grass Valley](#) on LinkedIn.



www.grassvalley.com/blog

This product may be protected by one or more patents. For further information, please visit: www.grassvalley.com/patents.

Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Grass Valley USA, LLC, or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Grass Valley USA, LLC or its affiliated companies, and other parties may also have trademark rights in other terms used herein.

Copyright © 2019, 2021 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.