

DATASHEET

# AMPP Edge Agile Compute Node

Scalable I/O and processing nodes for  
Grass Valley's Agile Media Processing Platform.

AMPP® Edge provides the on-premise I/O and compute resources for AMPP applications as part of the GV Media Universe workflows.

AMPP Edge is a turnkey server perfect for AMPP customers requiring signal contribution and transmission in and out of the AMPP SaaS platform, securely and with the lowest latency possible across any network.

In addition, AMPP Edge offers the ability to host various AMPP applications such as Flow Monitors, Clip Players, Multiviewers, Recorders, Master Control, Replay, Switchers and more, enabling production and broadcast operations from anywhere.

AMPP Edge enables remote viewing using the AMPP Flow Monitors to stream sources anywhere to an internet browser on a PC. This allows for low latency and secure streaming of multiviewer outputs from truck/venue, or camera feeds to producers in remote locations.

AMPP Edge is available in three models:

- GVAMPP-HW-STD
- GVAMPP-HW-XL-4000
- GVAMPP-HW-XL-5000

All models offer similar features and functions, and they differ only in their compute capacity and hardware specifications.

The STD version is rackmount server for installation in facilities, trucks and flypacks equipped with racks — it offers redundant power supplies and RAID-1 SSDs. The XL version is a 2 RU version for the most demanding applications like Alchemist® Live X and K-Frame™ CS X. The XL is also available with up to 2 I/O expansion cards SDI or ST 2110.

AMPP Edge offers SDI and SMPTE ST 2110/ST 2022-6/7 IP I/O options for signal acquisition and transmission up to UHD formats. IP routing is compliant with NMOS IS-04 and IS-05.

## Key Features

- Turnkey servers for AMPP customers managed by Grass Valley® DevOps team
- 1 RU and 2 RU rackmount or standalone versions
- Available with redundant power supplies and RAID file system
- SDI and IP interfaces for signal contribution or transmission
- Supports UHD and HDR
- IP interface compliant to SMPTE ST 2110, ST 2022-6/7 and NMOS IS-04/IS-05
- Low latency and secure streaming to and from AMPP SaaS platform
- Supports RIST and SRT ARQ streaming




## AMPP Edge Use Cases

### AMPP Edge for Remote Monitoring

In the context of remote working, a simple use case of an AMPP Edge is to stream local sources, from a venue or an outside broadcast (OB) truck, to a tablet or PC with just a web browser and an internet connection. For example, multi-viewer outputs are acquired from the OB truck and streamed to production staff members anywhere in the world, which allows them to participate in the production without being physically present.


- Production-grade monitoring experience:
  - High quality (full HD resolution)
  - Low latency (as low as 2-3 frames)
- Accessible via standard home internet connection:
  - Low bandwidth (~5 Mb/s)
  - Secured with encryption and authentication

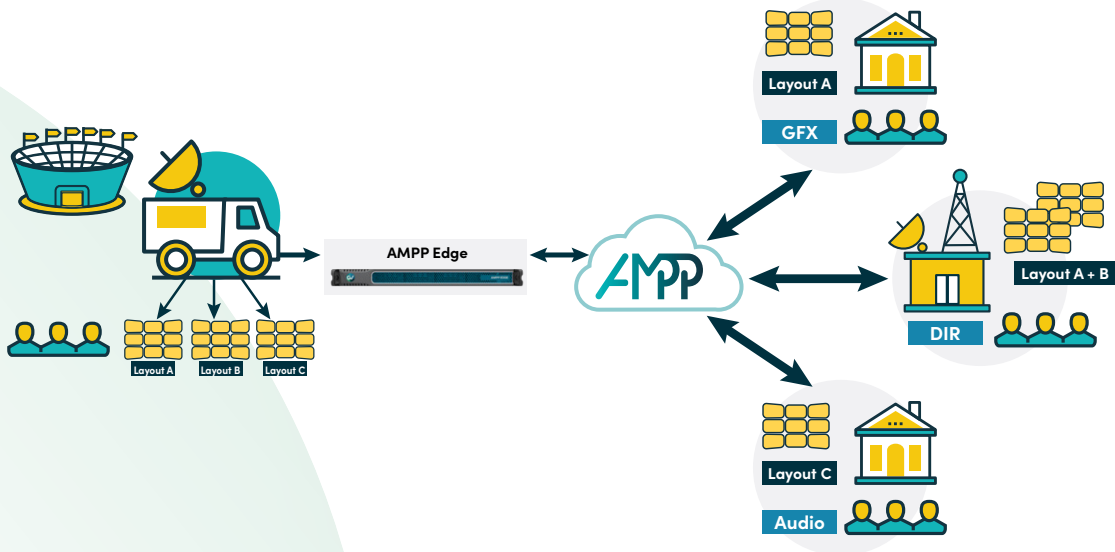

### AMPP Edge for Global Routing


Once a signal is acquired locally using an AMPP Edge, it can be routed to any other AMPP Edge anywhere in the world, or to an AMPP cloud instance running on cloud infrastructure providers. Once the signal reaches its destination, it is delivered back locally as an SDI or IP source. This is easily accomplished using the AMPP routing service. Local signals can be acquired and delivered in SDI or IP (SMPTE ST 2110, SMPTE ST 2022-6/7, NDI, MPEG-TS and more).

- Intelligent timing: outputs from multiple locations all co-timed
- Low latency: Edge-Cloud-Edge round trip in less than 1 second
- Easy connectivity: automatically routes streams across multiple networks
- Streams include video, all audio channels and the complete ancillary data

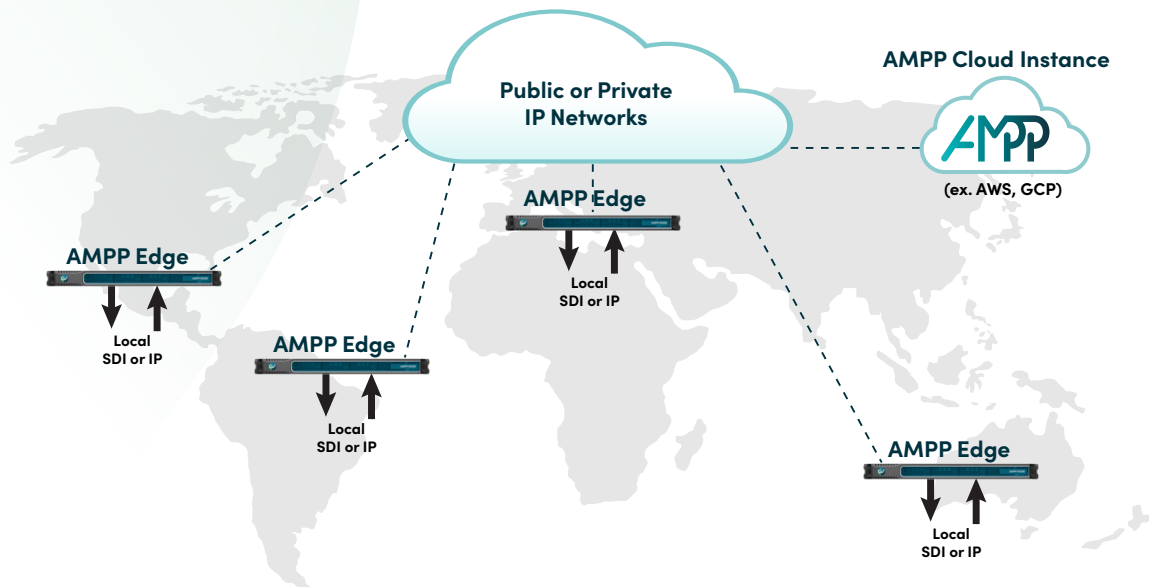

### AMPP Edge for Contribution


AMPP supports all common local input and output formats including SMPTE ST 2110, NDI and SDI for easy connecting to your existing devices. Global inputs and outputs allow you to stream between different AMPP fabrics and lets you choose the best possible transport for low-latency and high-quality streaming. Supporting RIST and SRT for reliable transport even over public Internet, AMPP gives you a wide variety of profiles to fit your needs.

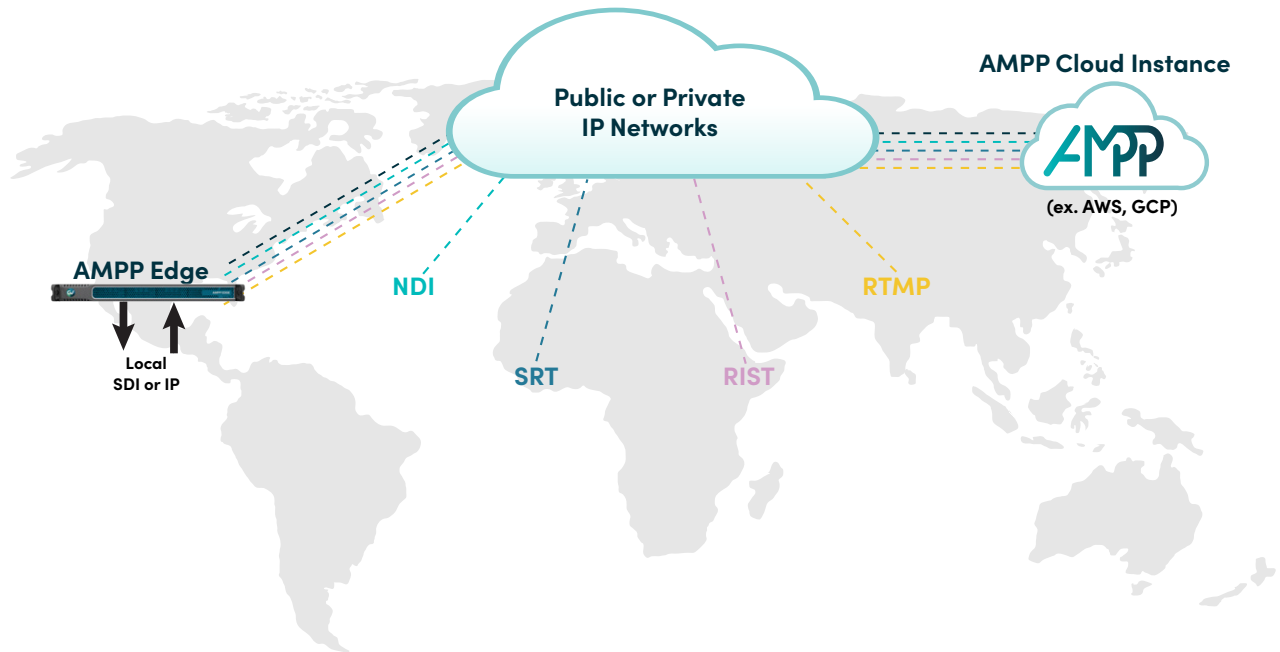

### Spin Up AMPP Processing Applications

In addition to signal I/O and contribution, an AMPP Edge offers on-premise compute resources to run AMPP Applications: master control or live production switcher, audio mixer, graphics and more!

Easily configure and spin up a complete media workflow, including built in live monitoring with flow monitors and multiviewers.

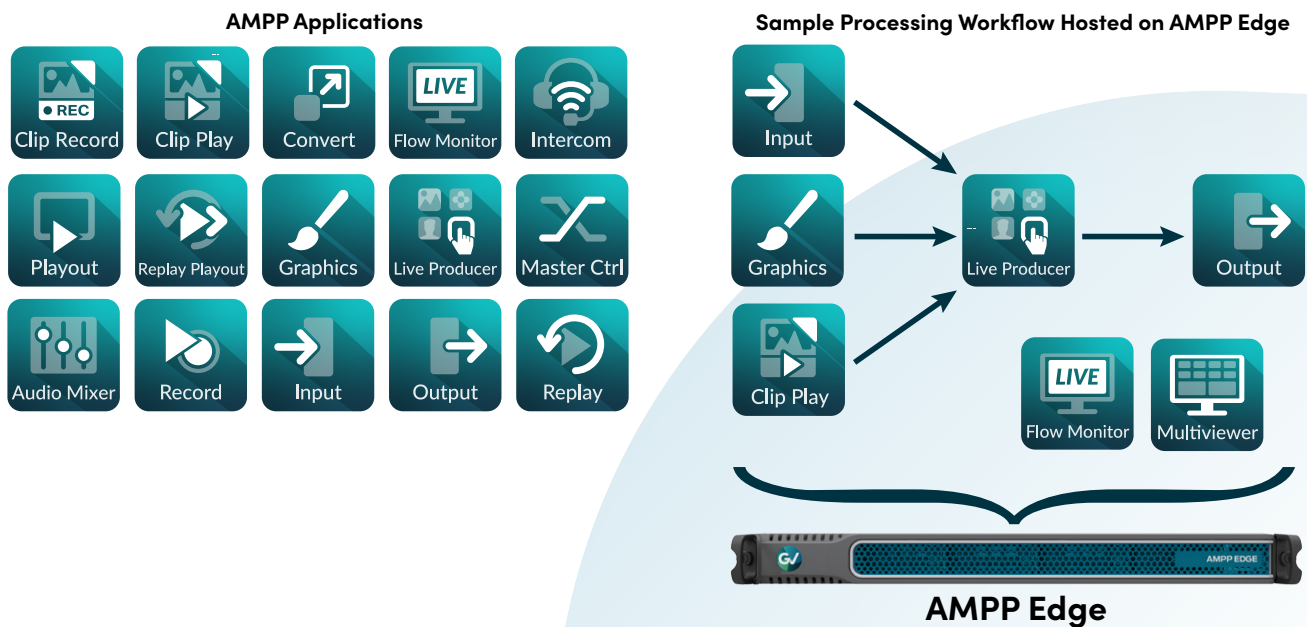

## Specifications

### I/O

#### SDI with EC9735 expansion option:

8x SD/HD/3G-SDI configurable inputs or outputs  
HD-BNC connectors

- 3G-SDI Level A (SMPTE ST 425-1 Level A Mapping)
- 3G-SDI Level B-DL (SMPTE ST 425-1 Level B Dual-Link Mapping)
- 3G-SDI Level B-DS (SMPTE ST 425-1 Level B Dual-Stream Mapping)
- Quad Link 3G-SDI (SMPTE ST 425-5)
- HD-SDI (SMPTE ST 292)
- SD-SDI (SMPTE ST 259)

#### IP with EC9733/EC9734 expansion option:

- Dual 10G/25G SFP (EC9733) or Dual 100G QSFP (EC9734)
- SMPTE ST 2022-6
- SMPTE ST 2022-7
- SMPTE ST 2110-20 uncompressed video over IP
- SMPTE ST 2110-30 PCM audio over IP
- SMPTE ST 2110-40 ancillary data over IP
- NMOS IS-04 and IS-05 discovery, registration and connection management
- SMPTE ST 2059 PTP synchronization

#### WAN/LAN transport:

- SMPTE ST 2022-2/MPEG-TS
- RIST/TR-06 Basic and Main Profile
- SRT
- RTMP(S)
- NDI

#### Encryption and protection:

- Flex-FEC
- DTLS-SRTP encryption

#### Video codecs:

- AVC/H.264: 4:2:0 or 4:2:2, 8- and 10-bit
- HEVC/H.265: 4:2:0 8- and 10-bit

#### Audio codecs:

- AAC
- Opus

#### Video Formats

**Resolution:** 480 (NTSC), 576 (PAL), 720 (HD), 1080 (full HD), 2160 (UHD)

**Scan:** Interlaced or progressive

**Frame Rate (Hz):** 23.97, 24, 25, 29.97, 50, 59.94

#### SDI I/O:

- (3G Level A) 1080p50/59.94
- (UHD quad-link) 2160p59.94 and 2160p50

### Audio

**SDI and SMPTE ST 2110/ST 2022-6:** Up to 16 tracks per channel

**Input:** 48 kHz, 16- or 24-bit digital audio

#### Reference Genlock (with EC9730/EC9732 options)

- Blackburst analog and tri-level sync
- Single DIN 1.0/2.3 connector

#### Supported on-premise I/O formats:


- SDI (with EC9735)
- SMPTE ST 2110 with NMOS IS-04/05 support (with EC9733/EC9734)
- SMPTE ST 2022-6/7 (with IP expansion option)
- NDI, including fill & key

#### Codecs and wrappers:

- H.264, H.265
- SRT
- RIST
- Zixi
- And more!

## Model Comparison

	GVAMPP-HW-STD	GVAMPP-HW-XL-4000	GVAMPP-HW-XL-5000
CPU	Dual Intel Xeon Silver 4310	Dual Intel Xeon Silver 4316	Dual Intel Xeon Silver 4316
CPU clock	2.1 GHz	2.3 GHz	2.3 GHz
Total CPU Cores	12	20	20
Total CPU Threads	24	40	40
GPU	NVIDIA RTX A4000	2x NVIDIA RTX A4000	2x NVIDIA RTX A5000
RAM	128 GB	256 GB	256 GB
Boot drives	2x 480 GB SSD in RAID-1	2x 480 GB SSD in RAID-1	2x 480 GB SSD in RAID-1
Slots for I/O cards	1 slot	2 slots	2 slots
Slots for additional SSD drives	8 slots	14 slots	14 slots
PSU	Redundant Power Supply – 1400W	Redundant Power Supply – 2400W	Redundant Power Supply – 2400W
Dimensions (WxHxD)	434 x 43 x 787 mm (17.09 x 1.69 x 30.99 in.)	434 x 87 x 737 mm (17.09 x 3.43 x 29.02 in.)	434 x 87 x 737 mm (17.09 x 3.43 x 29.02 in.)

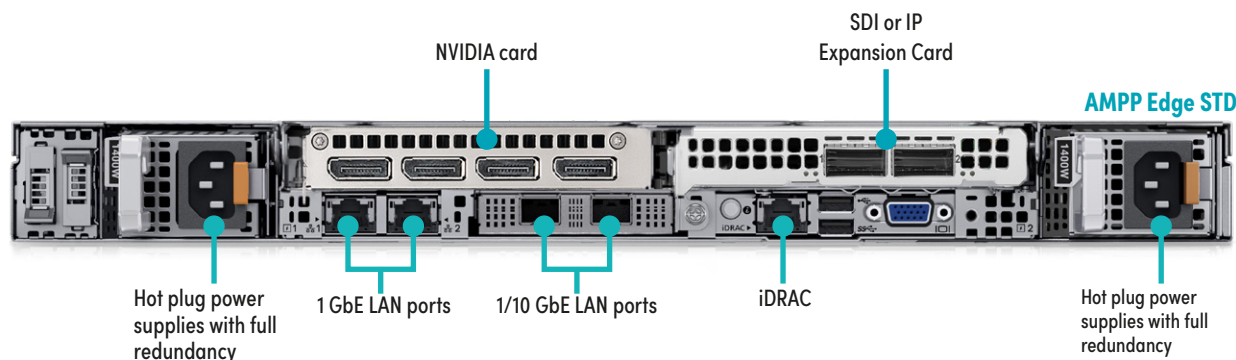



## Ordering

### AMPP Edge Nodes

#### GVAMPP-HW-STD

AMPP Edge — GV turnkey rack servers for HD/UHD I/O and edge processing workflows. Includes NVIDIA RTX A4000 graphics card. Requires either EC9735 for SDI workflows or EC9733/EC9734 for SMPTE ST 2110 IP workflows.

#### GVAMPP-HW-XL-4000

AMPP Edge — GV turnkey server for advanced AMPP I/O and edge processing workflows. Includes two NVIDIA RTX A4000 GPUs. Requires either EC9735 for SDI workflows or EC9733/EC9734 for SMPTE ST 2110 IP workflows.

#### GVAMPP-HW-XL-5000

AMPP Edge — GV turnkey server for advanced AMPP I/O and edge processing workflows. Includes two NVIDIA RTX A5000 GPUs. Requires either EC9735 for SDI workflows, or EC9733/EC9734 for SMPTE ST 2110 IP workflows.

### AMPP Edge I/O Options

#### EC9735

SDI expansion card — Deltacast video card (PCI-express). Provides 8 SDI ports independently configurable as input or output.

#### EC9733

IP expansion card — ConnectX-6 NIC — Dual 10G/25G NVIDIA/Mellanox IP interface card with SFP+ interfaces. Requires SFP-10G or SFP-25G (Must use 25G SFP for UHD). Includes Rivermax license and silver 1 year support.

#### EC9734

IP expansion card — ConnectX-6 NIC — Dual 100G NVIDIA/Mellanox IP interface card with QSFP interfaces. QSFPs not included. Includes Rivermax license and silver 1 year support.

#### SFP-10G

Two (2) 10 GbE SFP modules required for EC9733 card

#### SFP-25G

Two (2) 25 GbE SFP modules required for EC9733 card


### Disk Space Expansion

#### SSD-1920

Internal 1.92 TB SSD drive

#### SSD-3840

Internal 3.84 TB SSD drive

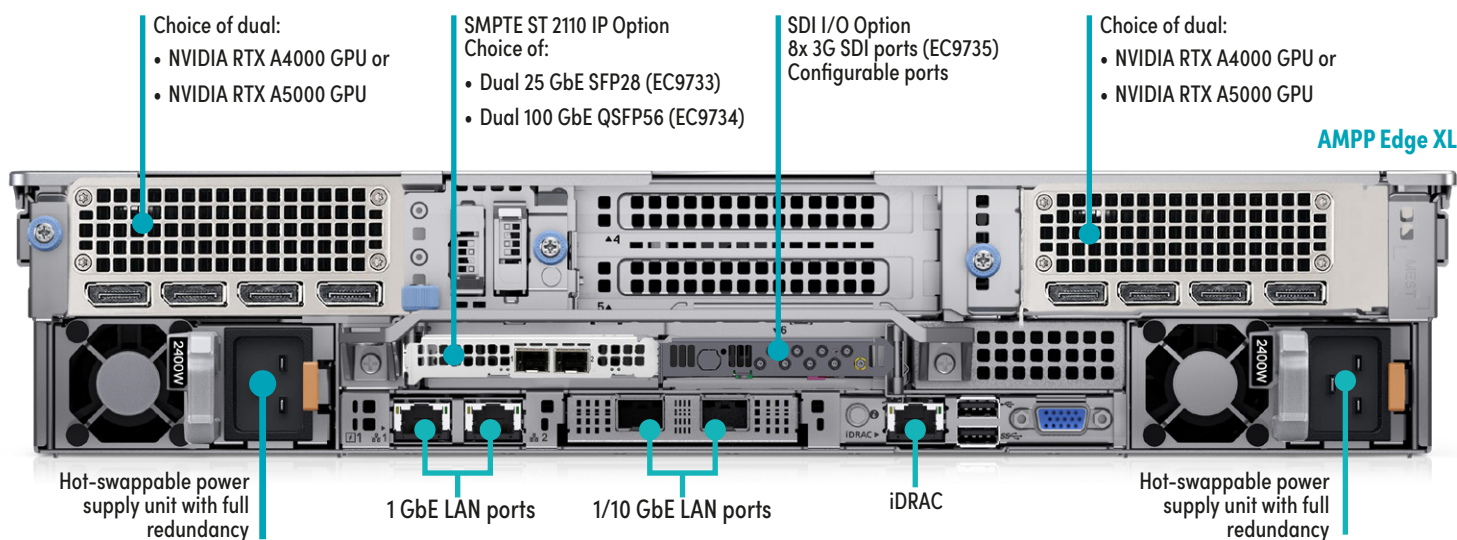

This product may be protected by one or more patents. For further information, please visit: [www.grassvalley.com/patents](http://www.grassvalley.com/patents)

DS-PUB-3-1014D-EN

GRASS VALLEY, GV, GV AMPP and the Grass Valley Logo are trademarks or registered trademarks of Grass Valley USA, LLC, or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Grass Valley USA, LLC or its affiliated companies, and other parties may also have trademark rights in other terms used herein. Copyright © 2021-2023 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.

[www.grassvalley.com](http://www.grassvalley.com) Join the Conversation at GrassValleyLive on [Facebook](#), [Twitter](#), [YouTube](#) and Grass Valley on [LinkedIn](#)