


HDA-1941

HDA-3941

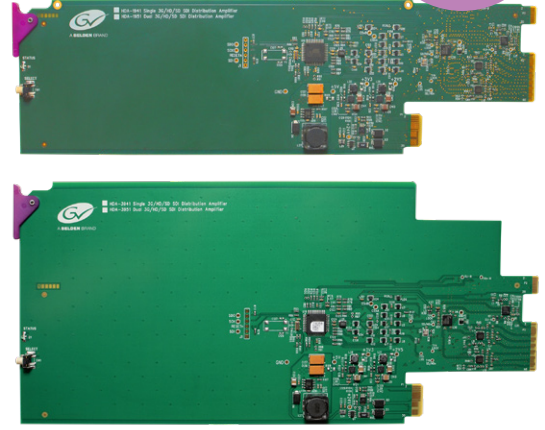

Single Channel 3G/HD/SD SDI Video Distribution Amplifiers

Single Channel DAs for Densité 2 and Densité 3 frames.

The HDA-1941 (for Densité-2 series) and HDA-3941 (for Densité-3, Densité-3+ and GV Node series) are single channel 3G/HD/SD SDI video distribution amplifiers from Grass Valley, designed for broadcast and production facilities. The two cards are functionally identical.

The HDA-1941/3941 DAs support a variety of compressed and uncompressed serial digital video signals. They provide up to nine reclocked outputs with automatic input equalization for up to 200 meters (656 feet) of cable using Belden 1694A at 1.5 Gb/s and up to 100 meters (328 feet) at 3 Gb/s.

Critical application protection is provided by optional bypass relays available on selected rears.

The HDA-1941 and HDA-3941 are single channel DAs, while the complementary HDA-1951 and HDA-3951 are dual channel DAs sharing the same performance quality, but with a higher density by doubling the number of DAs per slots for projects that do not require as many outputs per DA. See the HDA-1951/3951 datasheet for more information.

KEY FEATURES

- 3G/HD/SD SDI inputs
- Supports bit-rates up to 2.97 Gb/s
- Automatic format detection and cable equalization
- All outputs are DVB-ASI compatible
- Up to 9 3G/HD/SD SDI outputs on the HDA-1941 (2 RU)
- Up to 9 3G/HD/SD SDI outputs on the HDA-3941 (3 RU)
- 2 RU and 3 RU versions have the same functionality and performance
- Optional bypass relay protection available

SPECIFICATIONS

Electrical Inputs (1 or 2)

Signal:

SMPTE ST 259-C (270 Mb/s)
 SMPTE ST 292 (1.485, 1.485/ 1.001 Gb/s)
 SMPTE ST 424 (2.970, 2.970/ 1.001 Gb/s)
 EN50 83-9 DVI-ASI (270 Mb/s)

Cable length:

400m (1312 ft.) Belden 1694A at 270 Mb/s
 200m (656 ft.) Belden 1694A at 1.485 Gb/s
 100m (328 ft.) Belden 1694A at 2.970 Gb/s

Return loss:

>15 dB up to 1.5 GHz
 >10 dB from 1.5 GHz to 3 GHz

Electrical Outputs (Up to 10)

Signal:

SMPTE ST 259-C (270 Mb/s)
 SMPTE ST 292 (1.485, 1.485/ 1.001 Gb/s)
 SMPTE ST 424 (2.970, 2.970/ 1.001 Gb/s)
 EN50 83-9 DVI-ASI (270 Mb/s, all outputs)

Return loss:

>15 dB up to 1.5 GHz
 >10 dB from 1.5 GHz to 3 GHz

Jitter (wideband):

<0.2 UI p-p

Rise/fall time:

Reclocker on:
 <135 ps, 20% to 80%, for HD and 3G
 400 – 800 ps, 20% to 80%, for SD
 Reclocker off: <135 ps for all formats (3G, HD, SD)

Processing Performance

Signal path:

10 bits


Processing delay:

7 ns typical

Electrical

Power:

2.1W max.

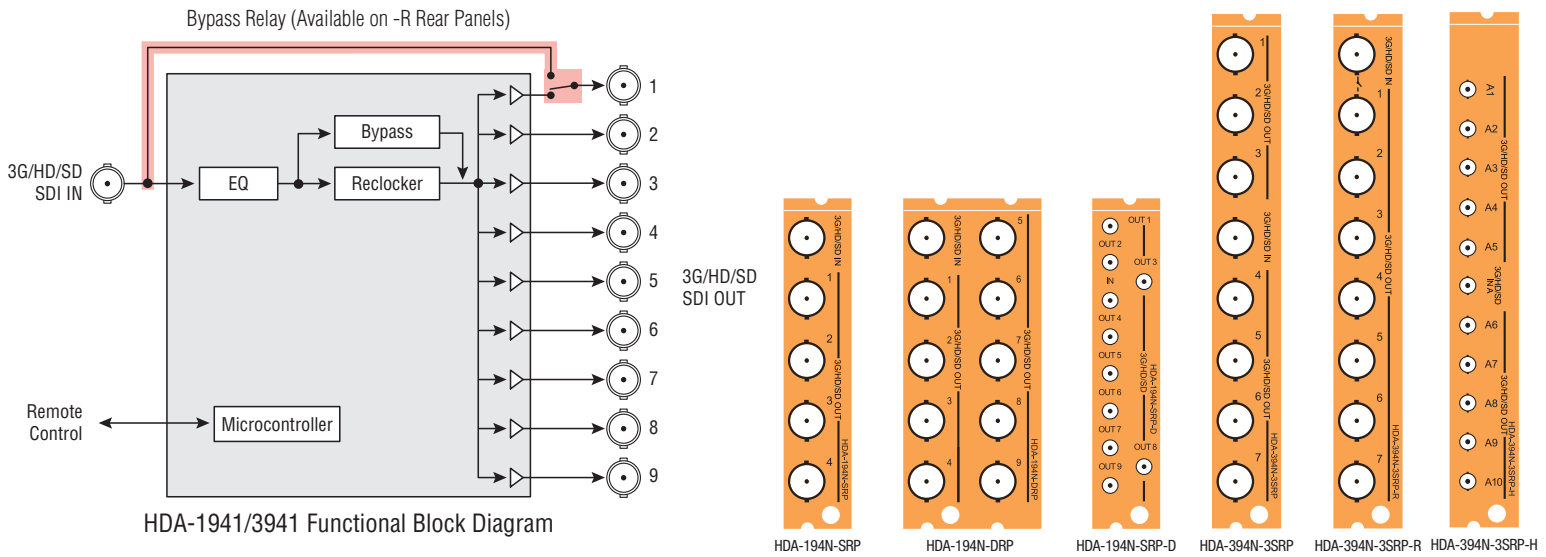

ORDERING

Densité 2 frame

HDA-1941
 HDA-194N-SRP
 HDA-194N-DRP
 HDA-194N-SRP-D

Densité 3 frame

HDA-3941
 HDA-194N-SRP-D-3RU
 HDA-394N-3SRP
 HDA-394N-3SRP-R
 HDA-394N-3SRP-H

Description

Single Channel 3G/HD/SD SDI Video Distribution Amplifiers
 Single rear for 1x4 operating mode with BNC connectors
 Double rear for 1x9 operating mode with BNC connectors
 Single rear for 1x9 operating mode with DIN connectors
 Single rear for 1x7 operating mode with BNC connectors
 Single rear for 1x7 operating mode, with bypass relay and BNC connectors
 Single rear for 1x9 operating mode with HD-BNC connectors

Remote control

GV Orbit, iControl, iControl Solo



WWW.GRASSVALLEY.COM

Join the Conversation at **GrassValleyLive** on Facebook, Twitter, YouTube and **Grass Valley** on LinkedIn.



www.grassvalley.com/blog

This product may be protected by one or more patents. For further information, please visit: www.grassvalley.com/patents.
 Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Grass Valley USA, LLC, or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Grass Valley USA, LLC or its affiliated companies, and other parties may also have trademark rights in other terms used herein.
 Copyright © 2016, 2021 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.