

IQMUX34

3G/HD/SD-SDI Embedder for Eight Analog Audio Channels

Includes audio delay, gain, invert and channel level routing, with video delay and a video proc amp also included.


The IQMUX34 from Grass Valley provides eight-channel analog audio embedding for 3 Gb/s SDI, HD-SDI 1.5 Gb/s or SD-SDI 270 Mb/s signals. Audio processing features include audio delay, gain, invert and channel-level routing, while video delay and a video proc amp are also included in the feature set. The IQMUX34 is ideal as a general analog audio ingest module for incorporating local audio feeds.

Why should you choose this module?

- Ideal as a general embedder for analog audio applications
- Full RollCall and SNMP compatibility allows easy integration with Grass Valley or third-party network management systems, providing an all-inclusive monitoring and control solution

KEY FEATURES

- 8-channel 3G/HD/SD-SDI embedder for analog audio inputs
- Standards supported:
 - 3G-SDI to SMPTE ST 424/425 level A & B compatible
 - HD-SDI to SMPTE ST 292/274/296
 - SD-SDI to SMPTE ST 259-C
- Handles up to 16 channels of embedded audio present on the incoming SDI stream
- Features include independent gain, invert, mute controls, channel level (sub-frame) routing, and adjustable delay for selected audio channels
- Embedding continues on loss of SDI input (silence)
- Any group of embedded audio may be passed unchanged, processed or blanked
- Embedded Dolby E support — pair routing and delay
- Up to 9 frames of video delay and 2 seconds of audio delay
- Video controls including video gain, offset, HANC and VANC blanking control
- Input loss detection — default output of black/pattern
- Transparent to all ancillary data inc. VANC metadata
- Built-in test pattern generator and audio tone generator
- 16x user memories, save/recall/rename
- RollCall control and monitoring compatible

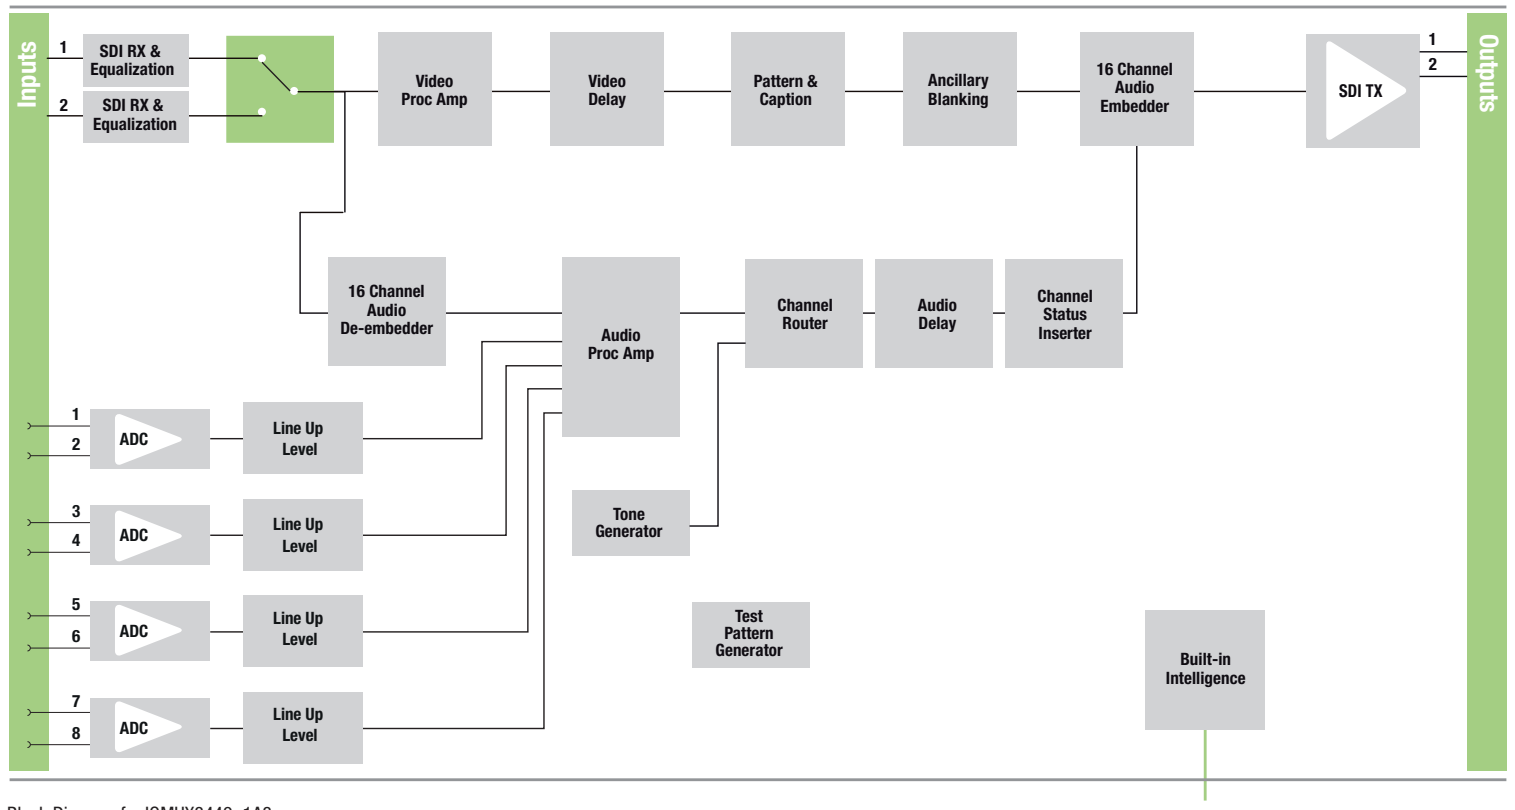

Block Diagram for IQMUX3449-1A3

Network Intelligence, Control & Monitoring

SPECIFICATIONS

Inputs and Outputs

Signal Inputs

SDI inputs: 2x

Input 1 cable length:

- Up to 70m Belden 1694A @ 3 Gb/s
- Up to 160m Belden 1694A @ 1.5 Gb/s
- >350m Belden 1694A @ 270 Mb/s

Input 2 cable length:

- Up to 60m Belden 1694A @ 3 Gb/s
- Up to 100m Belden 1694A @ 1.5 Gb/s
- Up to 100m Belden 1694A @ 270 Mb/s

Audio Signal Inputs

Balanced analog audio inputs: 8 channels (25-way D-type)

Signal Outputs

SDI outputs: 2x

Controls

Video Controls

Input standards: 1125(1080)/50P (A & B), 1125(1080)/59P (A & B), 1125(1080)/29i, 1125(1080)/25i, 750(720)/59P, 750(720)/50P, 525(480)/29i, 625(576)/25i

Default video output type: Pattern, Freeze, Black

Default video output standard: Last Known Good, 1125(1080)/50P (A & B), 1125(1080)/59P (A & B), 1125(1080)/29i, 1125(1080)/25i, 750(720)/59P, 750(720)/50P, 525(480)/29i, 625(576)/25i

Video select: Input 1, Input 2

Audio select: Video Input 1, Video Input 2, Follow Video

Manual freeze: On/Off

Freeze: Field/Frame

Video delay frames: 0 - 9 F

VANC data: Blank VANC

SD VANC data: Line blanking (6 controls)

Proc amp enable: On/Off

Black level: ± 100 mV in steps of 0.8 mVHue adjust: $\pm 180^\circ$ in steps of 1° Master video gain: ± 6 dB in steps of 0.1 dBY-gain: ± 6 dB in steps of 0.1 dBCb/Cr gain: ± 6 dB in steps of 0.1 dB

Y/C timing:

- ± 8 pixels in 2 pixel steps (SD)
- ± 16 pixels in 2 pixel steps (HD/3G)

Picture position:

- ± 8 pixels in 2 pixel steps (SD)
- ± 16 pixels in 2 pixel steps (HD/3G)

Pattern on: On/Off

Pattern select: 75% Color Bars, Black

Caption on: On/Off

Edit caption: 19 characters available

Audio Controls

Embedder Assignment

Group 1 to 4 enable: On/Off

Pair 1 to 8 source L: Dis-embed 1_1 to 8_2, Analog 1 to 8, Tone, Silence

Pair 1 to 8 source R: Dis-embed 1_1 to 8_2, Analog 1 to 8, Tone, Silence

Pair 1 to 8 stereo: Link channel pairs

Pair 1 to 8 polarity L/R: On/Off

Pair 1 to 8 gain L/R: +12 dB to -72 dB in 0.1 dB steps

Pair 1 to 8 non-PCM: On/Off

Processed Audio Delay Control

Coarse manual delay: Up to 1.75s in 5 ms steps

Fine manual delay: ± 0.25 s in 0.5 ms steps

Tone

Frequency L/R: 100 Hz to 10 kHz in 100 Hz steps

Channel ident: On/Off

HANC data: Blank HANC (removes all HANC data. Note audio removed when embedders disabled)

Audio Monitoring

Silence detect: 0 to -80 dB in steps of 1 dB

Signal overload detect: 0 to -80 dB in steps of 1 dB

Warning timer: 1 to 20 seconds in steps of 1 second

Audio Setup Controls

Analog headroom level: +12 dBu to +24 dBu

Note: Headroom level specified at 0 dBFS line up level

Other Controls

User memories: 16x Save, Recall, Rename

Memory naming: User configurable naming of memories 1 - 16

RollTrack sources: Unused, Video delay, Input present, Input 1 select, Input 2 select, Input loss, Output 525, Output 625, Output 720p, Output 1080i, Output 1080p, Output freeze, Output unfreeze, Output pattern on, Output pattern off, Output caption on, Output caption off, Disemb (Pairs 1-8) PCM, Disemb (Pairs 1-8) data, Disemb (Pairs 1-8) Dolby E, Disemb (Pairs 1-8) V bit, Disemb (Pairs 1-8) loss

Information window: Video input status, audio input status

Factory default: Resets all module settings to factory specified default values and clears memories

Default settings: Resets all module settings to factory specified defaults but does not clear memories

Restart: Software restart of the module

Module information:

Reports following module information: Software version, Serial number, Build number, KOS version, Firmware version, PCB version

General Specifications

Electrical:

3 Gb/s SDI, SMPTE ST 424

1.5 Gb/s HD-SDI, SMPTE ST 292

270 Mb/s SDI, SMPTE ST 259-C/DVB-ASI

Connector/format: BNC/75 Ω panel jack on standard IQ connector panel

Return loss:

>-15 dB (270 Mb/s, 1.5 Gb/s)

>-10 dB (3 Gb/s)

Output jitter:

SD-SDI 0.2 UI (10 Hz) / 0.2 UI (1 kHz)

3G/HD-SDI 1.0 UI (10 Hz) / 0.2 UI (100 kHz)

Video standards:

1125(1080)/50p (A & B), 1125(1080)/59p (A & B)

750(720)/50p, 750(720)/59p

1125(1080)/25i, 1125(1080)/29i

625(576)/25i, 525(480)/29i

Typical video delay:

SD: 70 μ sHD: 38 μ s3G-A: 19 μ s3G-B: 40 μ s

Embedded audio handling:

HD - 24-bit synchronous 48 kHz to SMPTE ST 299

SD - 20-bit synchronous 48 kHz to SMPTE ST 272-A

Embedded audio delay:

Minimum (PCM) 2 ms

Maximum (non-PCM):

- SD: 67 μ s- HD: 28 μ s- 3G-A: 15 μ s- 3G-B: 25 μ s

Analog Audio Input (Balanced)

Analog input impedance: 40 k Ω

Distortion (THD+N): -100 dB @ +24 dBu 800 Hz

Frequency response: 20 Hz-20 kHz +0.05 dB

Dynamic range: 114 dB typical

Power Consumption

Module power consumption:

9 W (A Frames)

9 PR (B Frames)

ORDERING

IQMUX3449-1A3, IQMUX3449-1B3

3G/HD/SD-SDI 8-channel analog audio embedder. 2 SDI outputs, 8 balanced analog audio inputs

For more details on enclosure types please refer to the IQ Modular Enclosures datasheet.



GVB-2-0862A-EN-DS



WWW.GRASSVALLEY.COM

Join the Conversation at [GrassValleyLive](#) on Facebook, Twitter, YouTube and [Grass Valley - A Belden Brand](#) on LinkedIn.www.grassvalley.com/blogThis product may be protected by one or more patents. For further information, please visit: www.grassvalley.com/patents.

Belden®, Belden Sending All The Right Signals®, the Belden logo, Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Belden Inc., GVBH Holdings S.A.R.L. or Grass Valley Canada. Belden Inc., GVBH Holdings S.A.R.L., Grass Valley Canada and other parties may also have trademark rights in other terms used herein.

Copyright © 2019 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.