

IQSYN11

3G/HD/SD-SDI Dual-channel Frame Synchronizer

Dual independent video path processing on one card with agile synchronization ensuring disturbance-free picture outputs.


The IQSYN11 from Grass Valley provides frame synchronization for HD-SDI at 3 Gb/s or 1.5 Gb/s, or SD-SDI 270 Mb/s. Includes dual-channel independent SDI input processing functionality and agile synchronization. A video proc amp provides complete control over the video levels. The IQSYN11 is a space-efficient low-cost solution that includes core functionality.

Why should you choose this module?

- Agile video synchronization provides greater tolerance to mis-timed upstream SDI switching (up to ± 5 lines), ensuring disturbance-free picture output
- Dual-channel, flexible handling of input loss — pass-through or switch to black/patterns/freeze — and integrated video controls make the IQSYN11 an ideal synchronizer for incoming lines applications
- Full RollCall and SNMP compatibility allows easy integration with Grass Valley or third-party network management systems, providing an all-inclusive monitoring and control solution

KEY FEATURES

- Dual-channel 3G/HD/SD-SDI synchronizer providing two independent video processing paths on one card with up to three frames of video delay per channel
- Standards supported:
 - 3G-SDI to SMPTE ST 424/425 level A & B compatible
 - HD-SDI to SMPTE ST 292/274/296
 - SD-SDI to SMPTE ST 259-C
- Loop-through reference capable of detecting and referencing to a bi-level or tri-level signal and selection from either external input directly or from internal IQH3B chassis reference bus
- Select either external input reference directly or from internal IQH3B chassis reference bus
- Precision genlock adjustment allowing you to time any SDI signal accurately
- Agile, router switching tolerant synchronizer operation
- Able to pass all ancillary data with independent HANC and VANC blanking control
- Input loss detection — default output of black/pattern/freeze
- Edit function for static/animated caption overlay on video output
- Can be used as a video delay, up to three frames per channel
- Video proc amp controls including video gain, offset and hue, including Y/C picture position adjustment
- Built-in test pattern generator and audio tone generator
- 16x user memories, save/recall/rename
- RollCall control and monitoring compatible

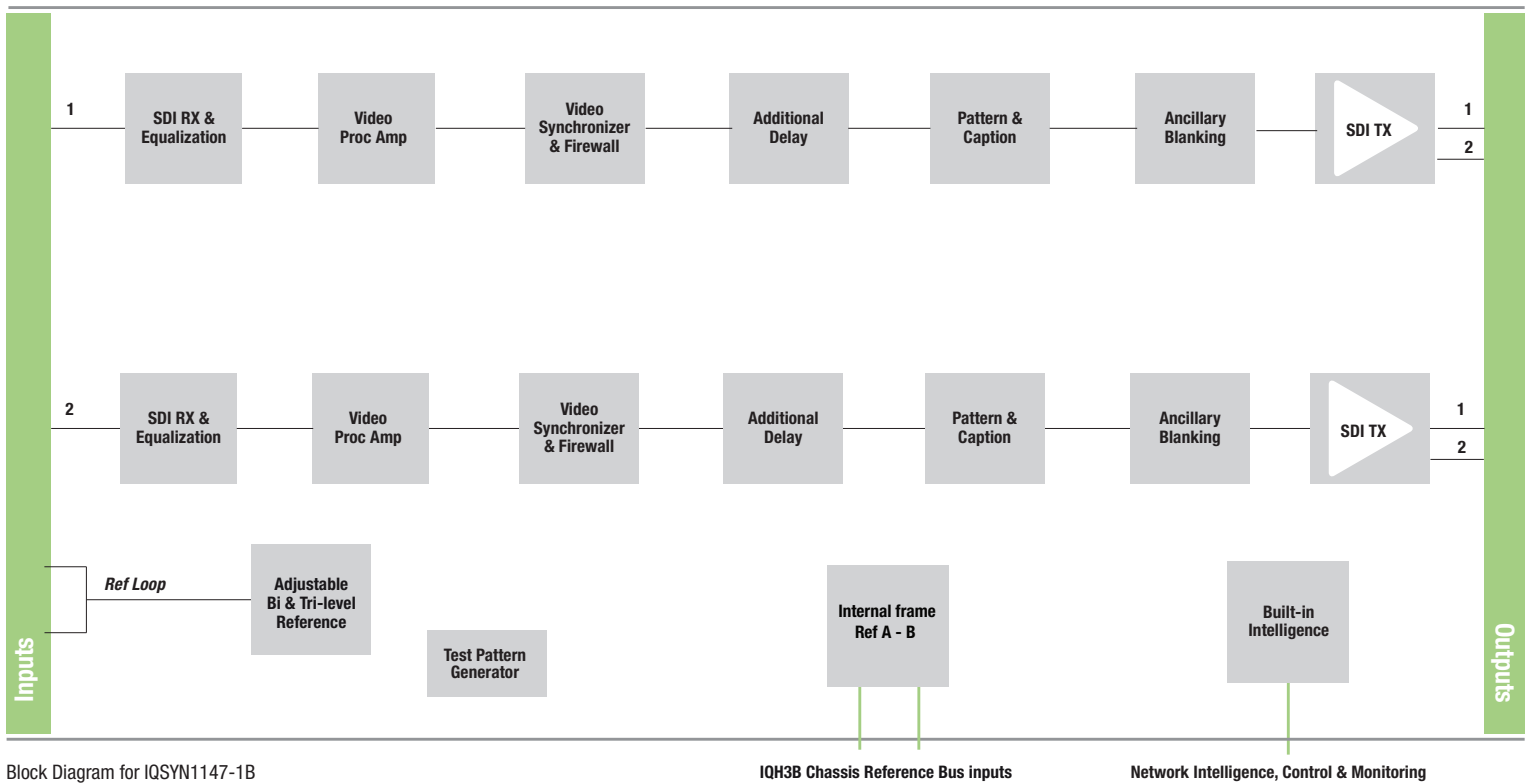

Block Diagram for IQSYN1147-1B

IQH3B Chassis Reference Bus inputs

Network Intelligence, Control & Monitoring

SPECIFICATIONS

Inputs & Outputs

Signal Inputs

SDI inputs: 1 per channel

Input 1 cable length:

- Up to 70m Belden 1694A @ 3 Gb/s
- Up to 160m Belden 1694A @ 1.5 Gb/s
- >350m Belden 1694A @ 270 Mb/s

Input 2 cable length:

- Up to 60m Belden 1694A @ 3 Gb/s
- Up to 100m Belden 1694A @ 1.5 Gb/s
- Up to 200m Belden 1694A @ 270 Mb/s

Analog reference:

- 1x analog reference with passive loop-through
- Black (HD tri-level and SD bi-level) and blackburst (SD bi-level)
- SD bi-level – RS170A
- HD tri-level – SMPTE ST 240, 274 and 296

Signal Outputs

SDI outputs: 2x per channel

Controls

Indicators

- Power: OK (Green)
- CPU running: OK (Green flashing)
- FPGA running: OK (Green flashing)

Status:

- OK (Green)
- Warning (Yellow)
- Error (Red)

Input 1: OK (Green)

Input 2: OK (Green)

Reference lock: OK or Cross-locking (Green), Std error (Green flashing)

Genlock & Video Delay

Genlock mode: Free-run, Lock to Reference, Lock to input

Genlock H-phase: $\pm 0.5H$ in pixel clock stepsGenlock V-phase: $\pm 0.5F$ in 1 line steps

Video H-delay: 0 – 1 Line in pixel clock steps

Video V-delay: 0 – 1 Frame in 1 line steps

Video delay frames: 0 – 3 F

Reference select mode:

- Module input reference or IQH3B
- Reference A or B

Video Controls (per channel)

Input standard: 1125(1080)/50P (A & B), 1125(1080)/59P (A & B), 1125(1080)/29i, 1125(1080)/25i, 750(720)/59P, 750(720)/50P, 525(480)/29i, 625(576)/25i

Default video output type: Pattern, Freeze, Black

Default video output standard: Last Known Good, 1125(1080)/50P (A & B), 1125(1080)/59P (A & B), 1125(1080)/29i, 1125(1080)/25i, 750(720)/59P, 750(720)/50P, 525(480)/29i, 625(576)/25i

Input select: Input 1, Input 2

Manual freeze: On/Off

Freeze: Field/Frame

VANC data: Blank VANC

SD VANC data: Line blanking (23/336 in 625, 21,22, 283, 284 in 525)

HANC data: Blank HANC (Removes all HANC data)

Proc amp enable: On/Off

Black level: ± 100 mV in steps of 0.8 mVHue adjust: $\pm 180^\circ$ in steps of 1° Master video gain: ± 6 dB in steps of 0.1 dBY-Gain: ± 6 dB in steps of 0.1 dBCb/Cr Gain: ± 6 dB in steps of 0.1 dB

Y/C timing:

 ± 8 pixels in 2 pixel steps (SD) ± 16 pixels in 2 pixel steps (HD/3G)

Picture position:

 ± 8 pixels in 2 pixel steps (SD) ± 16 pixels in 2 pixel steps (HD/3G)

Pattern on: On/Off

Pattern select: 75% Color Bars, Black

Caption On: On/Off

Edit caption: 19 characters available

Animated caption: Slow, medium, fast

Other Controls

User memories: 16x Save, Recall, Rename

Memory naming: User configurable naming of memories 1 – 16

Information window: Video Input Status, Reference Status

Factory default: Resets all module settings to factory specified default values and clears memories

Default settings: Resets all module settings to factory specified defaults but does not clear memories

Restart: Software restart of the module

Module information:

Reports following module information: Software version, Serial number, Build number, KOS version, Firmware version, PCB version

SPECIFICATIONS (CONT.)**General Specifications****Electrical:**

- 3 Gb/s SDI, SMPTE ST 424
- 1.5 Gb/s HD-SDI, SMPTE ST 292
- 270 Mb/s SDI, SMPTE ST 259-C / DVB-ASI

Connector/format: BNC/75Ω panel jack on standard IQ connector panel

Return loss:

- >-15 dB (270 Mb/s, 1.5 Gb/s)
- >-10 dB (3 Gb/s)

Output jitter:

- SD-SDI 0.2 UI (10 Hz) / 0.2 UI (1 kHz)
- 3G/HD-SDI 1.0 UI (10 Hz) / 0.2 UI (100 kHz)

Reference source: External – HD tri-level / SD bi-level / input video syncs

Electrical:

- Black (HD tri-level and SD bi-level) and blackburst (SD bi-level)
- SD bi-level – RS170A
- HD tri-level – SMPTE ST 240, 274 and 296

Connector/format: BNC/75Ω panel jack on standard IQ connector panel

Analog reference return loss:

- SD bi-level > 40 dB to 5.5 MHz
- HD tri-level > 35 dB to 30 MHz

Video standards:

- 1125(1080)/50p (A & B), 1125(1080)/59p (A & B)
- 750(720)/50p, 750(720)/59p
- 1125(1080)/25i, 1125(1080)/29i
- 625(576)/25i, 525(480)/29i

Minimum delay (reference lock or free run):

- SD: 67 μs
- HD: 28 μs
- 3G-A: 15 μs
- 3G-B: 25 μs

Typical delay (input lock):

- SD: 70 μs
- HD: 38 μs
- 3G-A: 19 μs
- 3G-B: 40 μs

Synchronizer hysteresis window: 5 μs


Power Consumption

Module power consumption: 8.5 PR (B Frames)

ORDERING**IQSYN1147-1B3**

3G/HD/SD-SDI Synchronizer. 2 inputs, 4 outputs, external loop-through and internal frame reference selection

For more details on enclosure types please refer to the IQ Modular Enclosures datasheet.

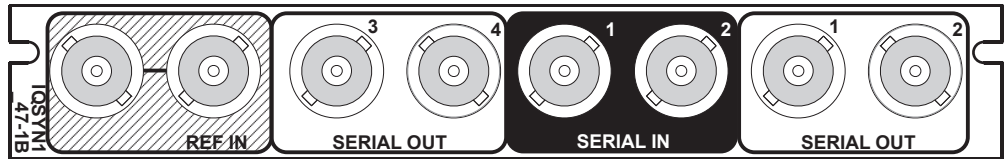

GVB-2-0744A-EN-DS



WWW.GRASSVALLEY.COM

Join the Conversation at [GrassValleyLive](#) on Facebook, Twitter, YouTube and [Grass Valley - A Belden Brand](#) on LinkedIn.



www.grassvalley.com/blog

This product may be protected by one or more patents. For further information, please visit: www.grassvalley.com/patents.

Belden®, Belden Sending All The Right Signals®, the Belden logo, Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Belden Inc., GVBB Holdings S.A.R.L. or Grass Valley Canada. Belden Inc., GVBB Holdings S.A.R.L., Grass Valley Canada and other parties may also have trademark rights in other terms used herein.

Copyright © 2019 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.