

picoLink Series

Video DAC

SDM-171p

Guide to Installation
and Operation
M144-9900-202

Copyright 2007
Miranda Technologies Inc.
Specifications may be subject to change.
Printed in Canada
March 2007



Miranda
Technologies inc.
3499 Douglas-B.-Floreni
St-Laurent, Québec, Canada H4S 1Y6

Tel. 514-333-1772
Fax. 514-333-9828
www.miranda.com

SDM-171p

Radio Frequency Interference and Immunity

This unit generates, uses, and can radiate radio frequency energy. If the unit is not properly installed and used in accordance with this guide, it may cause interference with radio communications. Operation with non-certified peripheral devices is likely to result in interference with radio and television reception. This equipment has been tested and complies with the limits in accordance with the specifications in:

FCC Part 15, Subpart B
CE EN50081-1:1992
CE EN50082-1:1992.

CONTACT MIRANDA

For technical assistance, please contact the Miranda Technical Support centre nearest you:

Americas

Telephone:

+1-800-224-7882

e-mail:

techsupp@miranda.com

Asia

Telephone:

+81-3-5730-2987

e-mail:

asiatech@miranda.com

Europe, Middle East, Africa, UK

Telephone:

+44 (0) 1491 820222

e-mail:

eurotech@miranda.com

France (only)

Telephone:

+33 (0) 1 55 86 87 88

e-mail:

eurotech@miranda.com

Visit our web site at

www.miranda.com

CONTENTS

	<i>page</i>
1.0 SDM-171p.....	1
1.1 Introduction.....	1
1.2 Features	1
2.0 Physical Layout.....	2
3.0 Installation	3
3.1 Power Supply	3
3.2 4:2:2 Input	4
3.3 CAV Outputs	4
4.0 Operation	5
4.1 Switch Settings.....	5
4.2 Status LED	6
5.0 Specifications.....	7

1.0 SDM-171p

1.1 Introduction

The SDM-171p is the industry's smallest 4:2:2 serial digital video to component analog video DAC. This product automatically detects 525-line and 625-line 4:2:2 signals conforming to the SMPTE 259M-C standard and provides BETA/EBU or GBR output signals. An internal test pattern generator provides a color bars test signal for both BETA/EBU and GBR outputs. In addition, this feature-packed unit delivers ease-of-use, a simplified design, easy installation and operation.

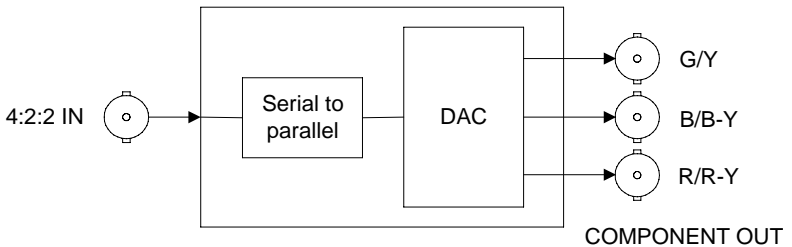


Figure 1: SDM-171p functional block diagram

1.2 Features

- Automatic 525-line and 625-line format input detection
- Output standard selection: BETA/EBU or GBR with or without setup
- Color bars generator
- Bi-color LED showing error status on input 4:2:2 signal
- Very small packaging with aluminum extruded body

2.0 Physical Layout

Figure 2 illustrates the SDM-171p's major parts and their locations. The video source is connected to the 4:2:2 input BNC and the component analog output signals are provided by the CAV outputs. Error status is provided by the status LED and mode settings are configured by two 3-position slide switches. Finally, the power source is connected to the power connector.

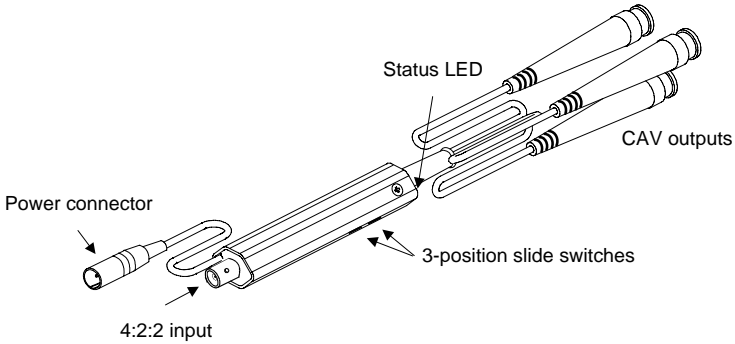


Figure 2: *Physical layout of the SDM-171p*

3.0 Installation

3.1 Power Supply

The power supplies LKS-WSA and LKS-WSE, for 110 V and 220 V operation respectively, are used to power the SDM-171p. Each power supply provides a regulated +5 VDC@750 mA power source. The SDM-171p employs a mini XLR-3 connector for its power needs. Figure 3 provides a detailed pinout of the male connector.

(male connector-facing)

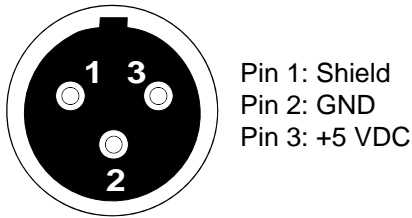


Figure 3: Power connector pinout

3.2 4:2:2 Input

Connect a 4:2:2 serial digital signal to the BNC labeled 4:2:2 IN. The 4:2:2 input signal must conform to the SMPTE 259M-C standard.

3.3 CAV Outputs

The CAV outputs consist of green, blue, and red color coded male BNC connectors. Male connectors are provided so as to connect the SDM-171p directly to monitoring equipment. Available CAV output standards are:

- BETA/EBU

BETA/EBU operation provides Y/B-Y/R-Y signals on the green, blue, and red BNCs respectively (BETA = 60Hz; EBU = 50Hz.).

- GBR

The GBR format can be with or without setup.

Refer to Section 4.0 *Operation* in order to select the desired output CAV standard.

4.0 Operation

4.1 Switch Settings

Figure 4 shows the slide switch locations and functions.

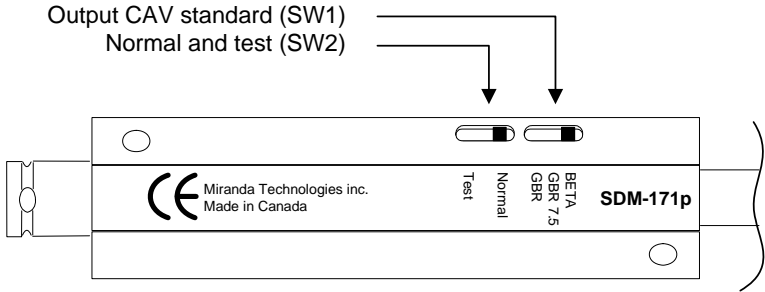


Figure 4: SDM-171p switch settings

Output CAV standard switch (SW1)

BETA: For BETA/EBU CAV outputs, set SW1 to this position.

- BETA: 60 Hz with setup
- EBU: 50 HZ, no setup

The Y/B-Y/R-Y outputs are provided by the green, blue, and red connectors respectively.

GBR 7.5: With 525-line inputs, set SW1 to this position for GBR outputs with 7.5 IRE setup. There is no setup for 625-line GBR outputs.

GBR: For GBR outputs with 0 IRE setup, set SW1 to this position.

Normal and test pattern switch (SW2)

Normal: For normal operation, set SW2 to this position.

Test: Set SW2 to Test in order to enable the test pattern generator. Make sure a valid 4:2:2 input signal is installed. 525-line outputs produce a 75% color bars signal whereas 625-line outputs produce a 75% color bars with 100% white bar signal.

4.2 Status LED

The bi-colored status LED, located next to the CAV output cable, is provided to identify any input errors and the selection of the test pattern. The following lists all possible situations.

Green: Indicates the SDM-171p is powered and has detected a valid 4:2:2 serial digital signal.

Red: Indicates an error with the input signal has been detected or simply, there is no input signal installed.

Yellow: The test pattern is selected.

If an input signal error is detected during a test pattern selection, the status LED will remain red.

5.0 Specifications

Input

Signal:	4:2:2 SMPTE 259M-C (270 Mbps)
Cable length:	250 m (850')
Return loss:	> 15 dB up to 270 MHz
Connector :	75 Ω BNC

Output

Signal: nominal	G/Y, B/B-Y, R/R-Y 700 mV with 280 mV sync
Return loss:	> 35 dB up to 5 MHz
Connector:	3 captive cables with 75 Ω male BNCs

Processing performance

Quantization:	8 bits
Sampling:	27 MHz (2X oversampling)
Freq. response:	± 0.5 dB to 5 MHz
Processing delay:	1.5 μ sec

Electrical

Voltage requirement:	+5 VDC
Power consumption:	3 W
Power connector:	Mini XLR-3

Mechanical

Overall size:	102 mm x 25 mm x 18 mm (4" x 1" x 0.7")
Power cable length:	127 mm (5")
Full spec. temp. range:	0°C (32°F) to 30°C (86°F)