

# ADX-3981

## 8 AES Audio and Metadata De-Embedder

Space-saving, modular platform for advanced signal processing.

The ADX-3981 from Grass Valley is an advanced, high-quality audio processor which de-embeds up to eight AES signals at 48 kHz from a 3G/HD/SD video signal.

The ADX-3981 can simultaneously process up to 32 channels of audio (16 channels from the embedded audio input plus others generated internally). Functions include downmixing, proc amp, channel shuffling, mixing and loudness measurement. The ADX-3981 generates audio/video fingerprints (via an iControl option) to detect and measure lip-sync errors in a broadcast facility.

The loudness measurement function allows the measurement and logging of up to four audio programs with iControl loudness monitoring software to analyze and report compliance with respect to various loudness regulations around the world.

The ADX-3981 has one on-board socket for optional modules, which can offer Dolby decoding, Dolby encoding and stereo upmixing using Linear Acoustic upMAX technology. One other module provides ALC using AEROMAX technology by Linear Acoustic, capable of maintaining constant loudness across different audio programs.

The card will pass and delay automatically all 32 internal audio channels to preserve lip sync between the channels. Each channel can be delayed independently to correct any lip sync issues. All audio channels can be mixed and shuffled to provide 16 channels for embedding in the video output, and 16 more channels on the discrete AES outputs.

An automatic preset recall feature provides basic automation to select user preset based on the status of the incoming audio.

When genlocked to the frame reference using the internal URS signal, the ADX-3981 can handle video hot switches at the input without losing sync at the output. In the absence of a video input, the card can still output synchronous video and audio silence on the discrete AES outputs.

The card has a frame buffer (not a frame sync) which allows an increase in the video delay of up to 15 frames to compensate for the long audio processing delay required by some modules. For applications which require a small processing delay, the frame buffer can be bypassed to reduce the delay to a few micro-seconds.

The ADX-3981 can de-embed ancillary timecode (ATC) in 3G/HD, or DVITC in SD, to generate linear timecode (LTC). Up to three GPIO can be used as input or output to embed or extract GPI events to/from the timecode user bits in transport applications. They can also be used simultaneously to trigger the card's user presets.

Dolby metadata insertion in the VANC is possible from multiple sources, such as a Dolby E decoder module, an embedded VANC stream, an external RS-422 link, or from the integrated metadata generator. All parameters in the metadata stream can be probed and monitored. Dolby metadata can be used to steer the behavior of the audio downmix and upmix modules.

A fiber input/output cartridge is offered as an option on some rear modules. Once the cartridge is installed, the inputs or outputs are selectable through the control interface. The input of the card allows you to select between fiber and copper inputs. The outputs are via copper and fiber simultaneously (with appropriate fiber cartridge).

There are many benefits to the ADX-3981's high level of feature integration. A lower purchase cost per channel is obviously highly desirable but there are many other dimensions to cost savings that are readily achievable. These include reduced space and cooling costs, less cabling and a reduced spares inventory. By simplifying video and audio synchronization, and reducing the number of vendors, the system integration is also simplified significantly.

**KEY FEATURES**

**Video**

- 3G/HD/SD input
- Supports 3 Gb/s level A (mapping 1) and level B
- Audio/video de-glitcher to handle video hot switch at the input
- Automatic detection of input video loss and switchover to local grey for continuous audio/video output synchronization
- Flexible HD/SD reference using the internal URS frame reference
- Minimum processing delay of 8 μs, but additional delay can be added up to 15 frames
- Optional optical fiber module
- Compatible with iControl end-to-end A/V fingerprint analyzer for lip sync error detection and measurement


**Metadata**

- AFD (SMPTE ST 2016), VLI (RP-186) and WSS insertion
- Linear timecode (LTC) embedding into DVITC (SD) or ATC (HD)
- Audio metadata insertion and extraction (SMPTE ST 2020-A)
- RS-422 serial data input and output to carry audio metadata
- 3 GPI I/O that can be inserted or extracted in the TC user bits. They can also be used for automation, user preset recall and loudness reset

**Audio**


- 8 AES outputs
- Full audio shuffling and mixing on a channel basis
- 32 channels internal audio processing
- Automation capabilities based on audio signal type detection

- Audio 5.1 surround downmix to Lt/Rt or Lo/Ro
- Audio dynamic processor option (compressor/limiter/expander)
- Audio delay adjustments of up to ±2 seconds to compensate for lip sync issues
- Loudness measurement of up to ±4 audio programs and logging with iControl loudness monitoring option
- Loudness compliant to EBU R128-2014, ATSC A/85:2013 (FCC CALM compliant) and ARIB TR-B32 (ITU-R BS.1770-3)
- On-board socket for 1 optional module expansion:
  - Dolby E and Dolby Digital decoder
  - Dolby Digital and Dolby Digital Plus encoder
  - Dolby E encoder
  - Linear Acoustic upMAX
  - Linear Acoustic AEROMAX automatic loudness control

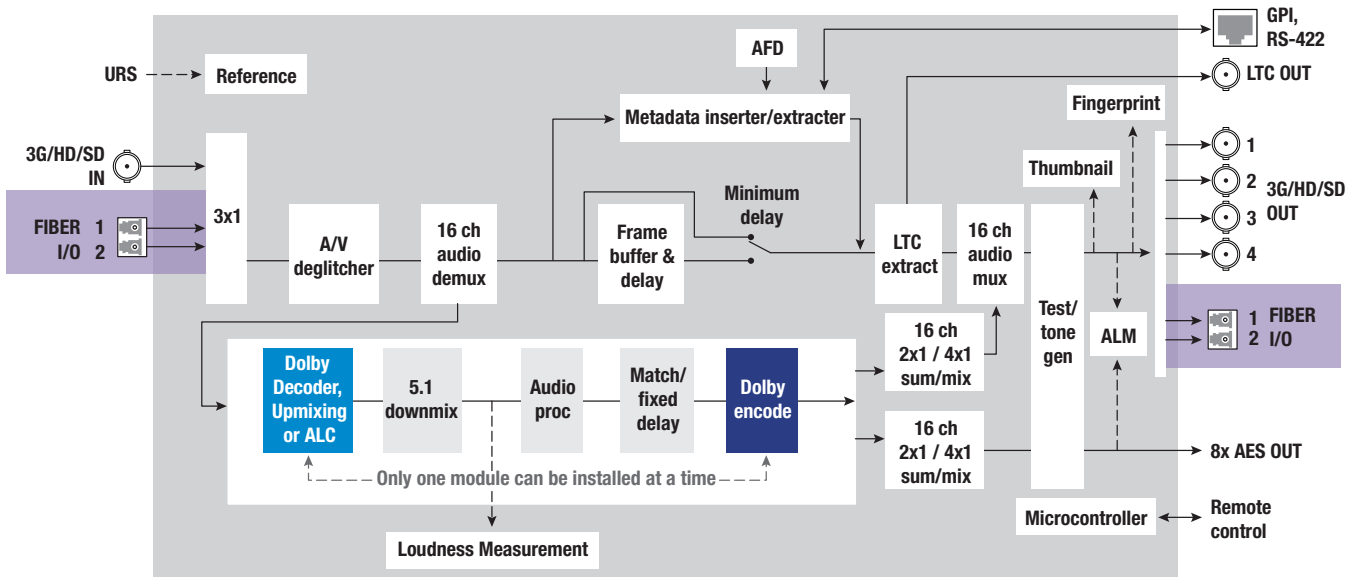

**ADX-3981 Functional Block Diagram**

Options (hardware & software)	
With appropriate fiber cartridge & -F rear module	
	MOD-DOLBY-ENC-D-2
	MOD-DOLBY-ENC-E-2
	MOD-LA-ALC
	MOD-LA-DUP-701
	MOD-DOLBY-DEC-2

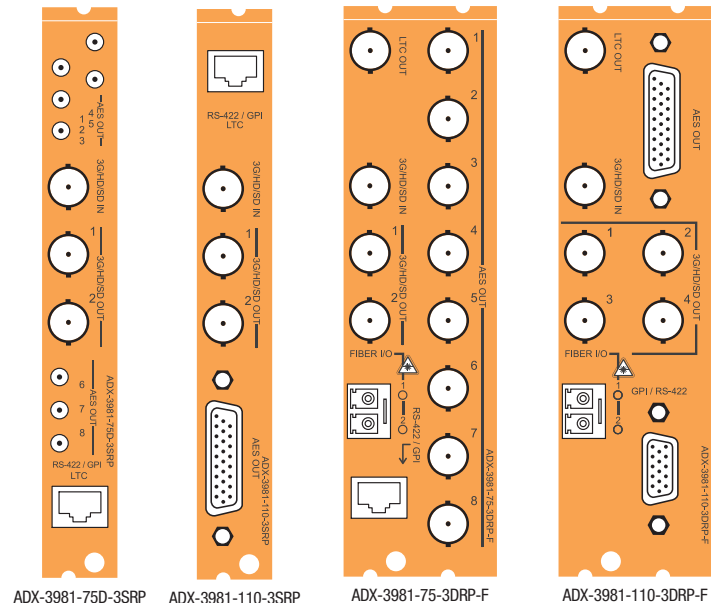

**SPECIFICATIONS**

**Video Input/Output**

**Signal (1):**

- SMPTE ST 259-C (270 Mb/s)
- SMPTE ST 292 (1.485, 1.485/1.001 Gb/s)
- SMPTE ST 424 (2.970, 2.970/1.001 Gb/s)

**Supported formats:**

- SD: 480i59.94, 576i50
- HD: SMPTE ST 274: 1080i59.94, 1080i50
- HD: SMPTE ST 296: 720p59.94, 720p50
- 3G: SMPTE ST 425 level A (mapping 1), level B: 1080p59.94, 1080p50

**Cable length:**

- 300m (984 ft.) Belden 1694A at 270 Mb/s
- 150m (492 ft.) Belden 1694A at 1.485 Gb/s
- 120m (393 ft.) Belden 1694A at 2.970 Gb/s

**Return loss:** >15 dB up to 3 GHz

**Jitter:**

- HD/SD: <0.2 UI
- 3G: <0.3 UI

**Audio Output (8)**

- Sampling freq.:** 48 kHz
- Quantization:** 24 bits

**AES3**

- Level: 2.75 Vp-p
- Impedance: 110Ω balanced

**AES-3id**

- Level: 1.0 Vp-p
- Impedance: 75Ω unbalanced

**Return loss:** 15 dB at 6 MHz

**Reference Input**

**Signal (1):** Through the URS internal frame reference signal

**Optical**

**Signal:** Refer to SFP module specifications

**LTC**

**Signal (1):** SMPTE ST 12

**Connectors:**

- RJ45 (-3SRP rear)
- BNC (-3DRP rear)

**Impedance:** <10 kΩ (bridging 600Ω) unbalanced

**Level:** 0.3 to 5 Vp-p

**GPIO (-3DRP Rear)**

**Signal (3):** Contact closure to ground  
**Direction:** Bidirectional (application specific)

**GPIO (-3SRP Rear)**

**Signal (2):** Contact closure to ground  
**Direction:** Bidirectional (application specific)

**RS-422**

**Signal (2):** RS-422  
**Input level:** 300 mVp-p (min)  
**Output level:** 3 Vp-p (min)  
**Rate:** 115,200 Bd

**Video Processing Performance**

**Signal path:** 10 bits  
**Processing delay (HD):** 8 μs (in minimum delay mode)  
**Additional delay:** Up to 15 frames upon user selection

**Audio Processing Performance**

**Quantization:** 24 bits  
**Sampling:** 48 kHz, synchronous  
**Audio latency:** 2 to 6 ms max in minimum delay depending on processing options  
**Audio delay:** Up to 2s (1 ms steps)

**Electrical**

**Power:** 12.5W



**ORDERING**

**Densité 3 frame**

Model	Description
ADX-3981	3G/HD/SD 8 AES audio and metadata de-embedder
ADX-3981-75D-3SRP	Single rear connector panel, 75 ohm Din 1.0/2.3
ADX-3981-110-3SRP	Single rear connector panel, 110 ohm
ADX-3981-75-3DRP-F	Double rear connector panel, 75 ohm and fiber connector
ADX-3981-110-3DRP-F	Double rear connector panel, 110 ohm and fiber connector

**Options (Hardware)**

Model	Description
SFP-RR-LC	Dual fiber RX (input) cartridge with LC/PC connector
SFP-TT-S13S13-LC	Dual fiber TX (output) cartridge at 1310 nm with LC/PC connector
SFP-R-LC	Single fiber RX (input) cartridge with LC/PC connector
SFP-T-S13-LC	Single fiber TX (output) cartridge at 1310 nm with LC/PC connector
SFP-RT-S13-LC	Single fiber RX (input) and TX (output) cartridge at 1310 nm with LC/PC connector

Other types of SFP Optical Plug-In Cartridges may be available for this product.

NSH15M	HD-15 to terminal block adapter
NSH26M	HD-26 to terminal block adapter
MOD-DOLBY-ENC-E-2	Dolby E encoder
MOD-DOLBY-ENC-D-2	Dolby Digital (AC-3) encoder
MOD-DOLBY-DEC-2	Dolby E and Digital (AC-3) decoder
MOD-LA-DUP-701	Upmixing using Linear Acoustic Technology upMAX
MOD-LA-ALC-2	2-channel ALC licensed by Linear Acoustic
MOD-LA-ALC-6	6-channel ALC licensed by Linear Acoustic
MOD-LA-ALC-8	8-channel ALC licensed by Linear Acoustic
MOD-LA-ALC-2-DUP	2-channel ALC and upmix licensed by Linear Acoustic
MOD-LA-ALC-6-DUP	6-channel ALC and upmix licensed by Linear Acoustic
MOD-LA-ALC-8-DUP	8-channel ALC and upmix licensed by Linear Acoustic
<b>Remote control</b>	iControl, iControl Solo, RCP-200



WWW.GRASSVALLEY.COM

Join the Conversation at **GrassValleyLive** on Facebook, Twitter, YouTube and **Grass Valley** on LinkedIn.



www.grassvalley.com/blog

This product may be protected by one or more patents. For further information, please visit: [www.grassvalley.com/patents](http://www.grassvalley.com/patents).

Belden®, Belden Sending All The Right Signals®, the Belden logo, Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Belden Inc., GVBB Holdings S.A.R.L. or Grass Valley Canada. Belden Inc., GVBB Holdings S.A.R.L., Grass Valley Canada and other parties may also have trademark rights in other terms used herein.

Copyright © 2020 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.