

IQSDA34

Triple-channel 3G/HD/SD-SDI Reclocking Distribution Amplifier with RollCall

A space-efficient reclocking distribution amplifier with flexible switching outputs for future-proof system design.


The IQSDA34 from Grass Valley provides three inputs with four outputs per input for distribution of 1080p 3 Gb/s SDI, HD-SDI 1.5 Gb/s or 270 Mb/s SD-SDI signals in a double-width package. Its 70m 3G, 140m HD-SDI input equalization performance and non-reclocking distribution of wide-band signals makes it ideal for all current distribution applications.

Why should you choose this module?

- The IQSDA34 is extremely space-efficient, providing four outputs per input and a density of 24 channels in 3 RU
- Operation at SMPTE ST 424 data rates allows future-proof system design
- Flexible output switching allows the module to adapt should distribution requirements change

KEY FEATURES

- Triple-channel intelligent 3G-SDI, HD-SDI and SD-SDI reclocking distribution amplifier
- Equalizes up to 70m at 3 Gb/s, 140m at 1.5 Gb/s and 350m at 270 Mb/s when using Belden 1694A cable
- Standards supported:
 - 1080p SDI to SMPTE ST 424
 - HD-SDI to SMPTE ST 292
 - SD-SDI to SMPTE ST 259-C
- Switchable option to connect channels together producing 1 input to 12 outputs, or 2 inputs with 8 and 4 outputs
- RollCall monitoring allows all signal paths to be managed

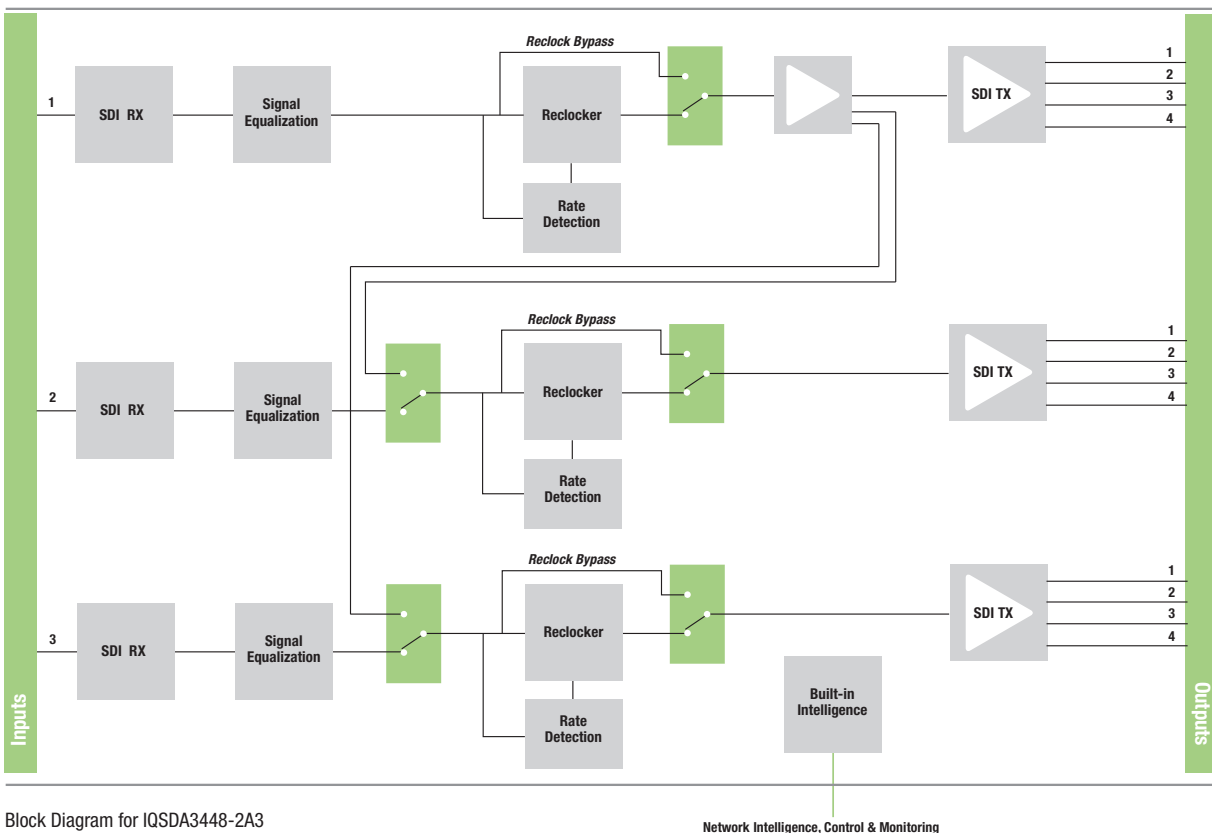

SPECIFICATIONS

Inputs and Outputs

Signal Input

SDI input: 3x

Input cable length:

Up to 70m Belden 1694A @ 3 Gb/s

Up to 140m Belden 1694A @ 1.5 Gb/s

Up to 350m Belden 1694A @ 270 Mb/s

Note: When using mixed HD and SD inputs it is recommended that cable lengths do not exceed the HD specification of 140m.

Signal Outputs

SDI outputs: 4x per input

ASI compatible outputs:

IQSDA3448-2A/B – Serial out 1/2, 1/3, Serial out 2/3, 2/4, Serial out 3/2, 3/4

IQSDA3400-2A/B – Serial out 1/1, 1/2, Serial out 2/2, 2/3, Serial out 3/3

Controls

Indicators

Power: OK (Green)

CPU: OK (Green flashing)

Input 1: OK (Green), Bypass (Orange), Loss (Red)

Input 2: OK (Green), Bypass (Orange), Loss (Red)

Input 3: OK (Green), Bypass (Orange), Loss (Red)

RollCall Functions

Input 1 (2) select: Auto, 3G, HD, SD, DVB-ASI, Bypass (reclocking off)

Input status: Present, Loss/Unknown, Data Rate

Logging:

Input 1 (2, 3) Type

Input 1 (2, 3) Data Rate

Input 1 (2, 3) Present

Input 1 (2, 3) Error

Input 1 (2, 3) Loss

RollTrack controls: On/Off, Index, Source, Address, Command, Status, Sending

RollTrack outputs:

Unused

Input 1 (2, 3) Present

Input 1 (2, 3) Rate Unknown

Input 1 (2, 3) Loss

Input 1 (2, 3) 3G

Input 1 (2, 3) HD

Input 1 (2, 3) SD

Other Controls

User memories: Name, save and recall 16 user memories

General Specifications

Electrical:

3 Gb/s SDI, SMPTE ST 424

1.5 Gb/s HD-SDI, SMPTE ST 292

270 Mb/s SDI, SMPTE ST 259-C/DVB-ASI

Connector/format: BNC/75Ω panel jack on standard GV connector panel

Return loss:

> -15 dB (270 Mb/s, 1.5 Gb/s)

> -10 dB (3 Gb/s)

Output jitter:

SD-SDI 0.2 UI (10 Hz) / 0.2 UI (1 kHz)

3G/HD-SDI 1.0 UI (10 Hz) / 0.2 UI (100 kHz)

Power Consumption

Module power consumption:

IQSDA3448-2A3 5W Max. (A frames)

IQSDA3448-2B3 5 PR Max. (B Frames)


IQSDA3400-2A3 6W Max. (A frames)

IQSDA3400-2B3 5 PR Max. (B Frames)

ORDERING


IQSDA3448-2A3, IQSDA3448-2B3

Triple-channel 3G/HD/SD-SDI reclocking distribution amplifier. 3 inputs, 4 outputs per input.

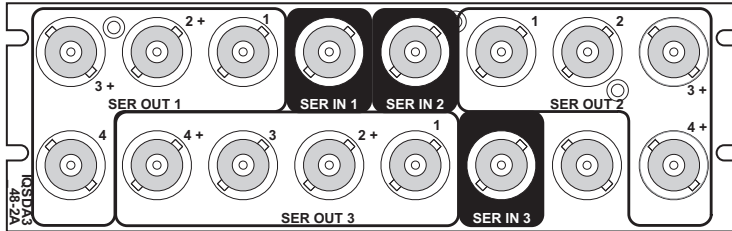

IQSDA3400-2A3, IQSDA3400-2B3

Triple-channel 3G/HD/SD-SDI reclocking distribution amplifier with relay input bypass. 3 inputs, 3 outputs per input.

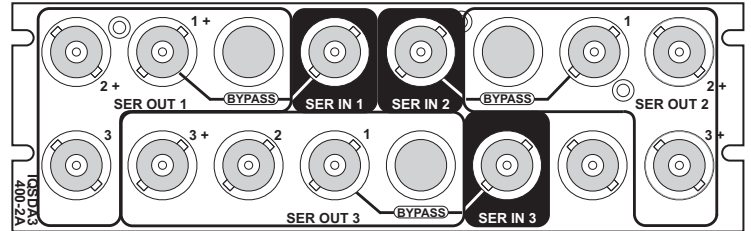

For more details on enclosure types please refer to the IQ Modular Enclosures datasheet.

DS-PUB-2-0890A-EN



WWW.GRASSVALLEY.COM

Join the Conversation at [GrassValleyLive](#) on Facebook, Twitter, YouTube and [Grass Valley - A Belden Brand](#) on LinkedIn.



www.grassvalley.com/blog

This product may be protected by one or more patents. For further information, please visit: www.grassvalley.com/patents.

Belden®, Belden Sending All The Right Signals®, the Belden logo, Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Belden Inc., GVBB Holdings S.A.R.L. or Grass Valley Canada. Belden Inc., GVBB Holdings S.A.R.L., Grass Valley Canada and other parties may also have trademark rights in other terms used herein.

Copyright © 2019 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.