

FXE-1501

Fiber Ethernet Transceiver

Space-saving, modular platform for advanced signal processing.

The FXE-1501 from Grass Valley provides distribution of Ethernet signals using optical fiber. It incorporates a bidirectional 10/100/1000 Base-T Ethernet to 1000 Base SX/LX gigabit fiber converter and transceiver.

The Ethernet UTP port incorporates auto speed negotiation, auto-crossover for MDI/MDI-X, and full or half duplex. Speed and activity indicators are

provided for this port on the rear panel. The SFP optical interface supports a loop back test, and lost link forwarding (LLF). Link activity and LLF status indicators are provided for this port on the rear panel.

Housed in a Densité frame and easily controllable via the iControl software or the frame controller menu, the FXE-1501 occupies only one slot.

KEY FEATURES

- 10/100/1000 Base-T Ethernet to fiber
- Fiber interface on SFP module for maximum flexibility
- Support loop back test for the optical SFP interface
- Supports lost link forwarding (LLF)
- Auto-negotiation for 10/100/1000 Base-T on the UTP port
- Auto-crossover for MDI/MDIX on the UTP port
- Full or half duplex on the UTP port
- Speed and link activity LEDs on the rear connector panel for the UTP port
- Link activity status LED on the rear panel for the optical interface
- Single slot in a Densité frame



SPECIFICATIONS

UTP Port

Connector: RJ45

Compliant to: 10 Base-T/100 Base-Tx/1000 Base-T with IEEE 802.3, IEEE 802.3u and IEEE 802.3x, speed auto sensing and auto MDI/MDI-X

SFP Port

Connector: SFP-compliant



Compliant to: IEEE 802.3z, 1000 Base-LX/SX

Electrical

Power: 5W

Rx Optical Characteristics	
Transmitter type	Receiver sensitivity
S13	-19 dBm
W13 / W15	-20 dBm

Tx Optical Characteristics			
Transmitter type	Transmit power	Wavelength	Laser type
S13	-9.5 to -3 dBm	Single-mode, 1310 nm	Fabry-Perot
W13 (WDM)	-9 to -3 dBm	Single-mode, 1310 nm	Fabry-Perot
W15 (WDM)	-9 to -3 dBm	Single-mode, 1550 nm	DFB (distributed feedback)

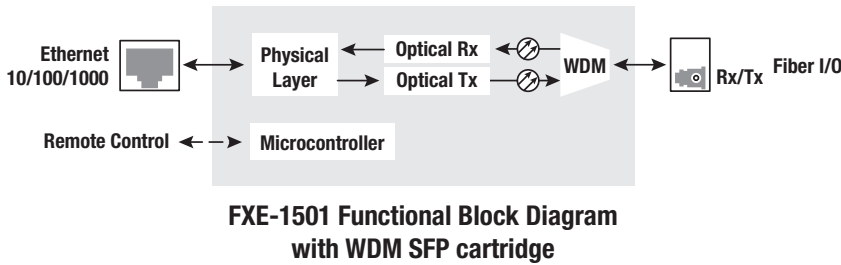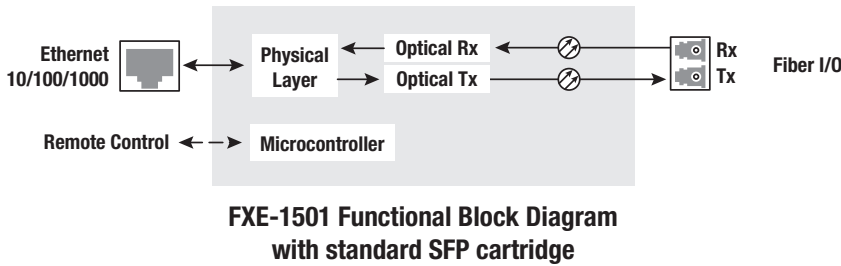

FXE-1501-SRP

ORDERING

Densité 2 Frame

FXE-1501

Fiber Ethernet transceiver*

FXE-1501-SRP

Single rear connector panel

Densité 3 Frame

FXE-1501-3RU

Fiber Ethernet transceiver*

FXE-1501-SRP-3RU

Single rear connector panel

*Note: One SFP cartridge must be ordered for each FXE-1501.

SFP Cartridges

SFP-ETH-10-S13-LC

Ethernet 10 km single-mode SFP cartridge / 1310 nm with LC/PC connector

SFP-ETH-RT-M85-LC

Ethernet 550m multimode cartridge / 850 nm with LC/PC connector

SFP WDM Cartridge Series

SFP-ETH-10-RT-W13-LC

Optical Ethernet WDM cartridge, 1310 nm, LC/PC connector

SFP-ETH-10-RT-W15-LC

Optical Ethernet WDM cartridge, 1550 nm, LC/PC connector

Remote Control

iControl, iControl Solo, RCP-200



WWW.GRASSVALLEY.COM

Join the Conversation at **GrassValleyLive** on Facebook, Twitter, YouTube and **Grass Valley - A Belden Brand** on LinkedIn.



www.grassvalley.com/blog

This product may be protected by one or more patents. For further information, please visit: www.grassvalley.com/patents.

Belden®, Belden Sending All The Right Signals®, the Belden logo, Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Belden Inc., GVBB Holdings S.A.R.L. or Grass Valley Canada. Belden Inc., GVBB Holdings S.A.R.L., Grass Valley Canada and other parties may also have trademark rights in other terms used herein.

Copyright © 2020 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.