

IQSDA30

Dual-channel 3G/HD/SD-SDI Reclocking Distribution Amplifier with Remote Control

Extremely space efficient solution offering dual inputs with three outputs per input in a single-width package.


The IQSDA30 from Grass Valley provides dual inputs with three outputs per input for distribution of HD-SDI 3 Gb/s, 1.5 Gb/s or 270 Mb/s SD-SDI signals in a single-width package. Its 80m 3G, 180m HD input equalization performance and non-reclocking distribution of wideband signals make it ideal for all distribution applications.

Why should you choose this module?

- The IQSDA30 is extremely space efficient, providing an incredible density of HD/SD-SDI outputs and distribution channels at 32 per rack unit and 10.6 per rack unit respectively
- Useful for critical installation thanks to outstanding input equalization capability
- Full GV Orbit compatibility provides an all-inclusive remote configuration, control and monitoring solution
- Comprehensive SNMP support allows easy integration with third-party Network Management Systems

KEY FEATURES

- Dual-channel intelligent 3 Gb/s SDI, HD-SDI and SD-SDI reclocking distribution amplifier
- Will distribute DVB-ASI and other wideband signals
- Equalizes up to 80m at 3 Gb/s, 180m at 1.5 Gb/s and more than 350m at 270 Mb/s when using Belden 1694A cable
- Standards supported:
 - 3G-HD to SMPTE ST 424
 - HD-SDI to SMPTE ST 292
 - SD-SDI to SMPTE ST 259-C
 - DVB-ASI
- GV Orbit control and monitoring compatible
- Extremely compact — up to 32 channels in 3 RU — for use where space is at a premium

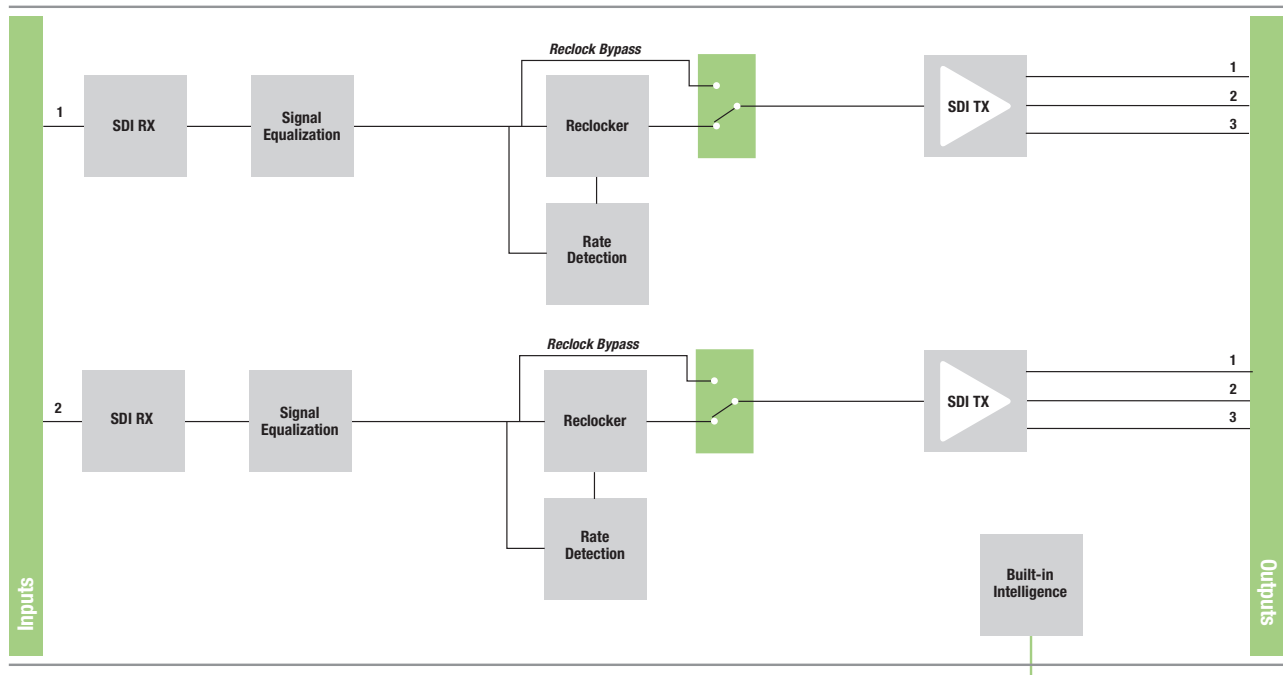

Block Diagram for IQSDA3047-1B3

Network Intelligence, Control & Monitoring

SPECIFICATIONS

Inputs and Outputs

Signal Input

SDI inputs: 2x
 Input cable length:
 Up to 80m Belden 1694A @ 3 Gb/s
 Up to 180m Belden 1694A @ 1.5 Gb/s
 >350m Belden 1694A @ 270 Mb/s

Signal Outputs

SDI outputs: 3x per input

Controls

Indicators

Power: OK (Green)
 CPU: OK (Green flashing)
 Input 1: OK (Green), Bypass (Orange), Loss (Red)
 Input 2: OK (Green), Bypass (Orange), Loss (Red)

Remote Control Functions

Input 1 (2) select: Auto, 3G, HD, SD, DVB-ASI, Bypass (reclocking off)
 Input status: Present, Loss/Unknown, Data Rate
 Logging:
 Input 1 (2) Type
 Input 1 (2) Data Rate
 Input 1 (2) Present
 Input 1 (2) Error
 Input 1 (2) Loss
 RollTrack controls: On/Off, Index, Source, Address, Command, Status, Sending
 RollTrack outputs:
 Unused
 Input 1 (2) Present
 Input 1 (2) Rate Unknown
 Input 1 (2) Loss
 Input 1 (2) 3G
 Input 1 (2) HD
 Input 1 (2) SD

Other Controls

User memories: Name, save and recall 16 user memories


General Specifications

Electrical:
 3 Gb/s SDI, SMPTE ST 424
 1.5 Gb/s HD-SDI, SMPTE ST 292
 270 Mb/s SDI, SMPTE ST 259-C / DVB-ASI
 Connector/format: BNC/75Ω panel jack on standard IQ connector panel
 Return loss:
 >-15 dB (270 Mb/s, 1.5 Gb/s)
 >-10 dB (3 Gb/s)
 Output jitter:
 SD-SDI 0.2 UI (10 Hz) / 0.2 UI (1 kHz)
 3G/HD-SDI 1.0 UI (10 Hz) / 0.2 UI (100 kHz)
Power Consumption
 Module power consumption:
 3 PR Max (B Frames)
 3 PR Max with relay rear (B frames)

ORDERING


IQSDA3047-1A3, IQSDA3047-1B3

Dual-channel 3G/HD/SD-SDI reclocking distribution amplifier. 2 inputs, 3 outputs per input.



IQSDA3061-1B3

Dual-channel 3G/HD/SD-SDI reclocking distribution amplifier with relay input bypass. 2 inputs, 2 outputs per input.



For more details on enclosure types please refer to the IQ Modular Enclosures datasheet.



WWW.GRASSVALLEY.COM

Join the Conversation at **GrassValleyLive** on Facebook, Twitter, YouTube and **Grass Valley** on LinkedIn.



www.grassvalley.com/blog

This product may be protected by one or more patents. For further information, please visit: www.grassvalley.com/patents.

Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Grass Valley USA, LLC, or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Grass Valley USA, LLC or its affiliated companies, and other parties may also have trademark rights in other terms used herein.

Copyright © 2020-2021 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.